


Individual mounting

Inline

Series

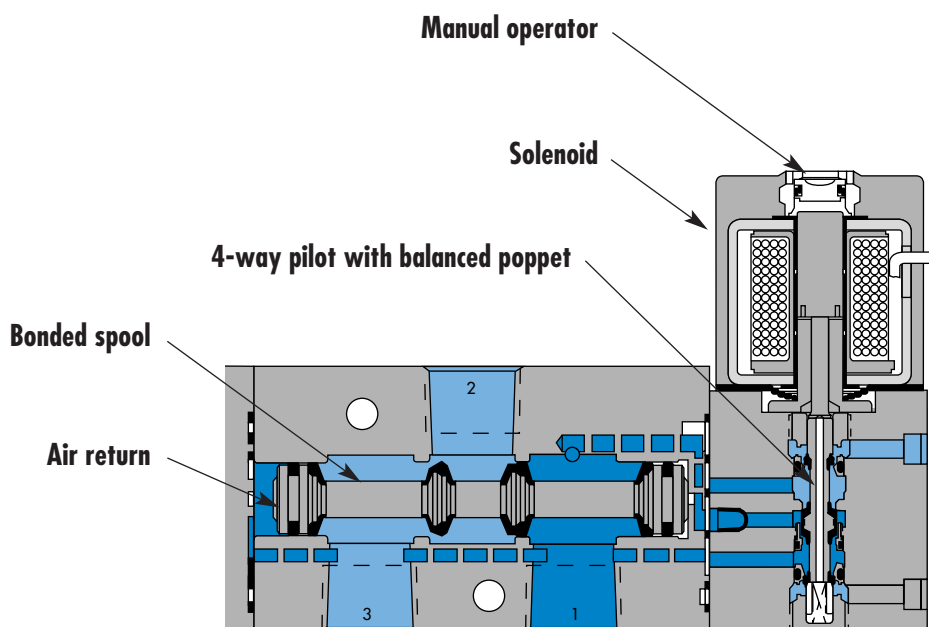

SERIES FEATURES

- Patented MACSOLENOID® for fastest possible response times and virtually burn-out proof AC solenoid operation.
- Optional low watt DC solenoids.
- Various manual operators.
- Optional memory spring.
- Normally closed or normally open valve function.
- May be plugged for 2-way operation.
- Internal or external pilot.

33

34

36

32

37

38

52

67

69

44

46

42

47

48P

48

400

92

93

ISO 01



ISO 02

ISO 1

ISO 2

ISO 3

SPOOL CONFIGURATIONS

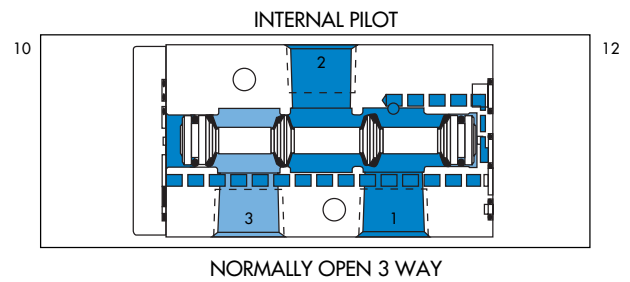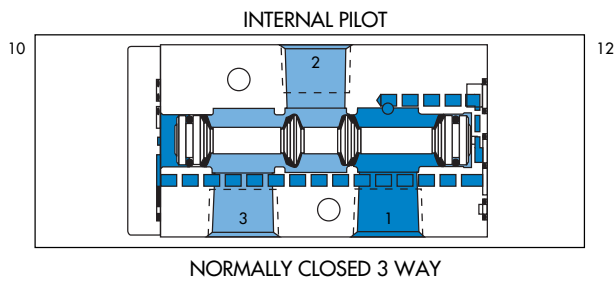

Function	Port size	Flow [Max]	Individual mounting	Series
3/2 NO-NC, 2/2 NO-NC	1/8" - 1/4"	1.5 C_v	Inline	

OPERATIONAL BENEFITS

1. The 4-way pilot develops maximum shifting force both ways.
2. Memory spring available.
3. Balanced spool, immune to variations of pressure, also provides high flow.
4. Short stroke with high flow.
5. Bonded spool with minimum friction, shifting in a glass-like finished bore.
6. Pilot with balanced poppet, high flow, short and consistent response times.
7. Wiping effect eliminates sticking.
8. Long service life.



33

34

36

32

37

38

52

67

69

44

46

42

47

48P

48

400

92

93

ISO 01

ISO 02

ISO 1

ISO 2

ISO 3

HOW TO ORDER

Port size	Pilot air	Single Operator		Double Operator	
		NO Valve	NC Valve	NO Valve	NC Valve
1/8" NPTF	Internal	52A-31-A0A-XX-X- XXX-XXX	52A-11-A0A-XX-X- XXX-XXX	52A-41-A0A-XX-X- XXX-XXX	52A-21-A0A-XX-X- XXX-XXX
1/4" NPTF	Internal	52A-31-B0A-XX-X- XXX-XXX	52A-11-B0A-XX-X- XXX-XXX	52A-41-B0A-XX-X- XXX-XXX	52A-21-B0A-XX-X- XXX-XXX
1/8" NPTF	External	52A-31-A0B-XX-X- XXX-XXX	52A-11-A0B-XX-X- XXX-XXX	52A-41-A0B-XX-X- XXX-XXX	52A-21-A0B-XX-X- XXX-XXX
1/4" NPTF	External	52A-31-B0B-XX-X- XXX-XXX	52A-11-B0B-XX-X- XXX-XXX	52A-41-B0B-XX-X- XXX-XXX	52A-21-B0B-XX-X- XXX-XXX

SOLENOID OPERATOR ➤

DM-D **XXX-XXX***

XX	Voltage	X	Wire length	X	Manual operator	XX	Electrical connection
JA	110/50, 120/60 (2.9W)	A	18" (Flying leads)	1	Non-locking recessed	KA	Square connector
JB	220/50, 240/60 (2.9W)	B	24" (Flying leads)	2	Locking recessed	KD	Square connector with light
JC	24/60 (2.9W)	J	Connector			JB	Rectangular connector
FB	24 VDC (1.8W)					JD	Rectangular connector with light
DA	24 VDC (5.4W)					BA	Flying leads
DF	24 VDC (12.7W)						

SOLENOID OPERATOR ➤

GM-G **XXX-XXX****

XX	Voltage	X	Wire length	X	Manual operator	XX	Electrical connection
DC	24 VDC (1.8W)	A	18"	1	Non-locking recessed	BA	Flying leads
DD	24 VDC (2.5W)	B	24"	2	Locking recessed	BT	Flying leads with light
DF	24 VDC (4.0W)	C	36"			KA	Plug-in wire assy.
						KT	Plug-in wire assy. with light

* Other options available, see page 309.

** Other options available, see page 313.

OPTIONS

52A-31-A0A-XX-X-**XXX-XXX**

For memory spring, replace by **4** (single solenoid only)

TECHNICAL DATA


Fluid :	Compressed air, vacuum, inert gases
Pressure range :	Internal Pilot : 20 to 120 PSI External Pilot : Vacuum to 120 PSI
Lubrication :	Not required, if used select a medium aniline point lubricant (between 180°F and 210°F)
Filtration :	40 µ
Temperature range :	0°F to 120°F (-18°C to +50°C)
Flow :	1/8" : (1.2 C _v) – 1/4" : (1.5 C _v)
Coil :	Class A continuous duty, #22 AWG x 18 lead wires
Voltage range :	-15% to +10% of nominal voltage
Protection :	Consult factory
Power :	~Inrush: 10.9 VA Holding: 7.7 VA = 1.8 to 12.7 W
Response times :	24V=5.4W Energize: 7.3 ms De-energize: 5.3 ms 120/60 Energize: 8-12 ms De-energize: 7-11 ms

Options :

- BSPP threads

DIMENSIONS

Dimensions shown are metric (mm)

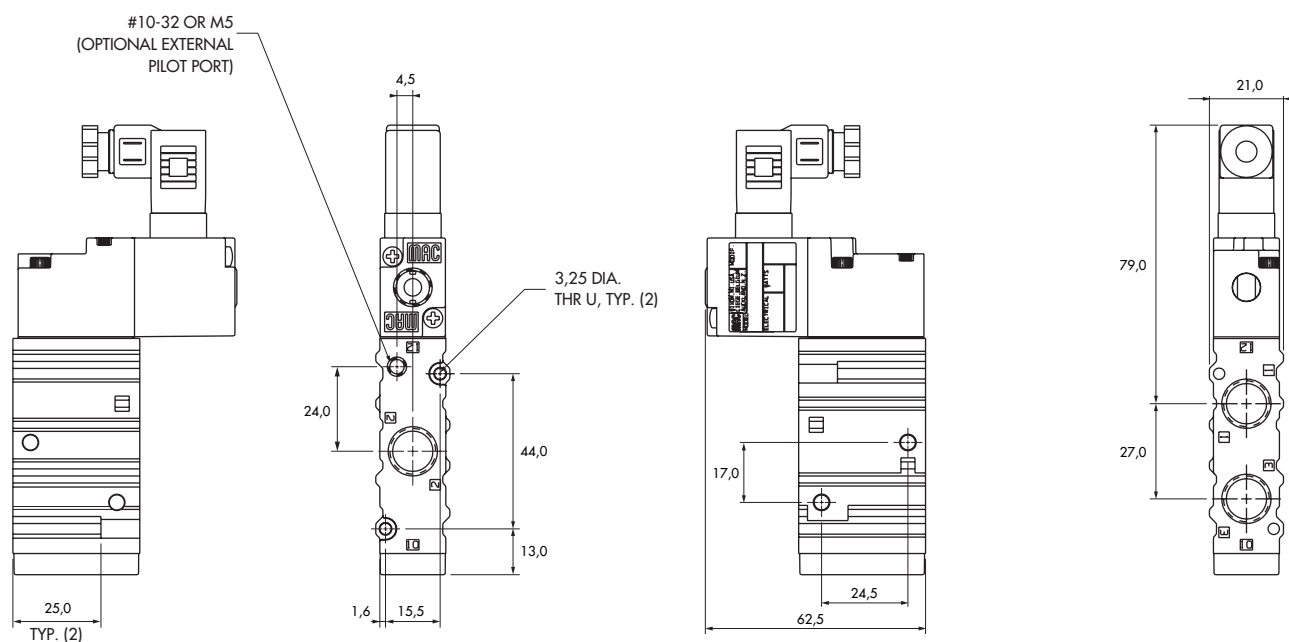

Codification table for voltages / Manual operator / Electrical connection

VALVE CODE ➤ **-DM- D XX X-X XX**
1 2 3 4

OPTIONS AVAILABLE FOR

- Pilot operated valves 52, 67, 92, 93, 400, ISO1, ISO2, ISO3 Series

1. VOLTAGE

D-XX X-X XX	VOLTAGE
DA	24 VDC (5.4W)
DB	12 VDC (5.4W)
DC	12 VDC (7.5W)
DD	24 VDC (7.3W)
DE	12 VDC (12.7W)
DF	24 VDC (12.7W)
DK	110 VDC (4.7W)
DJ	28 VDC (5.2W)
DL	64 VDC (6.0W)
DM	36 VDC (5.3W)
DN	6 VDC (6.0W)
DR	90 VDC (6.6W)
DS	110 VDC (7.3W)
DT	75 VDC (5.6W)
DP	48 VDC (5.8W)
FA	12 VDC (1.8W)
FB	24 VDC (1.8W)
FE	12 VDC (2.4W)
FF	24 VDC (2.4W)
JA	120/60, 110/50 (2.9W)
JB	240/60, 220/50 (2.9W)
JC	24/60, 24/50 (3.7W)
JD	100/60, 100/50, 110/60 (3.9W)
JE	220/60 (3.4W)
JF	240/50 (2.8W)
JG	200/60, 200/50 (3.9W)

2. WIRE LENGTH

D-XX X-X XX	WIRE LENGTH
0	No wires
A	18"
B	24"
C	36"
D	48"
E	72"
F	96"

3. MANUAL OPERATOR

D-XX X-X XX	MANUAL OPERATOR
0	No operator
1	Non-locking recessed
2	Locking recessed
3	Non-locking extended
4	Locking extended

4. ELECTRICAL CONNECTION

D-XX X-X XX	ELECTRICAL CONNECTION
BA*	Flying leads (grommet)
BK*	BA with protection diode
BL*	BA with protection varistor
BM**	Flying leads (solenoid plug-in)
BN**	BM with protection diode
BP**	BM with protection varistor
BG**	BM with ground
BH**	BM with protection diode & ground
BJ**	BM with protection varistor & ground
CA*	1/2" NPS conduit with flying leads
CM*	1/2" NPS metal conduit with flying leads
CN*	1/2" NPS metal conduit with flying leads & ground
JB	Rectangular connector
JD	JB with light
JM	Rectangular connector (male only)
KA	Mini square connector
KB	KA with protection diode
KC	KA with protection varistor
KD	KA with light
KE	KA with light and protection diode
KF	KA with light and protection varistor
KG	KA with light & diode
KJ	Mini square connector (male only)
KK	KJ with protection diode (male only)
KL	KJ with protection varistor (male only)
TA	Dual tabs with receptacles
TB	TA with protection diode
TD	TA with light
TE	TA with light and protection diode
TJ	Dual tabs (male only)
TK	TJ with protection diode
TM	TJ with light
TN	TJ with light and protection diode

* From Lead wire length options choose A through F

** From Lead wire length options choose 0 through F

Note: When coil is above 30 volts, a ground wire is required. Applies to options with flying leads.

Codification table for voltages / Manual operators / Electrical connections

VALVE CODE ➤ **-GM- G XX X-X XX**
1 2 3 4

OPTIONS AVAILABLE FOR

- Solenoid valves 52 & 400 Series

1. VOLTAGE		4. ELECTRICAL CONNECTION	
G-XX X-X XX	VOLTAGE	G-XX X-X XX	ELECTRICAL CONNECTION
DC	24 VDC (1.8 W)	BA	Flying leads
DD	24 VDC (2.5 W)	BB	BA with ground wire
DE	24 VDC (3.0 W)	BC	BA with light parallel to leads
DF	24 VDC (4.0 W)	BD	BA with light parallel to leads & ground wire
DJ	12 VDC (1.8 W)	BE	BA with suppression diode
DK	12 VDC (2.5 W)	BF	BA with suppression diode & ground wire
DM	12 VDC (3.0 W)	BG	BA with suppression diode plus light parallel to leads
DN	12 VDC (4.0 W)	BH	BA with suppression diode plus light parallel to leads & ground wire
2. WIRE LENGTH		*BN	BA with suppression diode plus blocking diode
G-XX X-X XX	WIRE LENGTH	*BP	BA with suppression diode plus blocking diode & ground wire
0	No lead wire (use only with "KJ" & "KM" electrical connectors)	*BR	BA with suppression diode plus blocking diode & light parallel to leads
A	18"	*BS	BA with suppression diode plus blocking diode & light parallel to leads & ground wire
B	24"	BT	BA with light on top
C	36"	BU	BA with light on top & ground wire
D	48"	BV	BA with suppression diode plus light on top
E	72"	BW	BA with suppression diode plus light on top & ground wire
F	96"	*BX	BA with suppression diode plus blocking diode & light on top
G	120"	*BY	BA with suppression diode plus blocking diode & light on top & ground wire
H	144"		
3. MANUAL OPERATOR		SOLENOID PLUG-IN CONNECTOR WITH LEADS	
G-XX X-X XX	MANUAL OPERATOR	G-XX X-X XX	SOLENOID PLUG-IN CONNECTOR WITH LEADS
1	Non-locking recessed	GA	MAC JAC Solenoid plug-in
2	Locking recessed	GB	MAC JAC Solenoid plug-in w/Diode
3	Non-locking extended	GC	MAC JAC Solenoid plug-in w/MOV
4	Locking extended	GD	MAC JAC Solenoid plug-in w/LED
		GE	MAC JAC Solenoid plug-in w/Diode & LED
		GF	MAC JAC Solenoid plug-in w/MOV & LED
		GG	MAC JAC Solenoid plug-in w/Rectifier
		GH	MAC JAC Solenoid plug-in w/Rectifier & LED
		KA	Plug-in wire assembly
		KB	KA with ground wire
		KE	KA with suppression diode
		KF	KA with suppression diode & ground wire
		KJ	Plug-in housing without wire assembly ('KA' without wire assembly)
		KM	Plug-in housing without wire assembly ('KB' without wire assembly)
		*KN	KA with suppression diode plus blocking diode
		*KP	KA with suppression diode plus blocking diode & ground wire
		KT	KA with light on top
		KU	KA with light on top & ground wire
		KV	KA with suppression diode plus light on top
		KW	KA with suppression diode plus light & ground wire
		*KX	KA with suppression diode plus blocking diode & light on top
		*KY	KA with suppression diode plus blocking diode & light on top & ground wire

Note: Blocking diode is located in the lead wire