


Tensione massima	250 Vca	Maximum voltage	250 Vac
Tensione di lavoro	220 Vca	Working voltage	220 Vac
Intensità di corrente	3A (resistivi) 2A (induttivi)	Current	3A (resistive) 2A (inductive)
Contatti elettrici	SPDT	C/O contact	SPDT
Temperatura di lavoro	-5°C...+80°C	Temperature range	-5°C to +80°C
N° cicli max a pistone	60/1'	Max cycle rate - piston type	60/min.
Differenziale fisso	≤ 30% del valore di taratura	Fixed hysteresis	≤ 30% of set-point
Protezione	IP65 - DIN 40050	Protection	IP65 - DIN 40050 see page 2
Connettore	PG09 - DIN 43650	PG09 connector	DIN 43650

SIGLA DI ORDINAZIONE / HOW TO ORDER

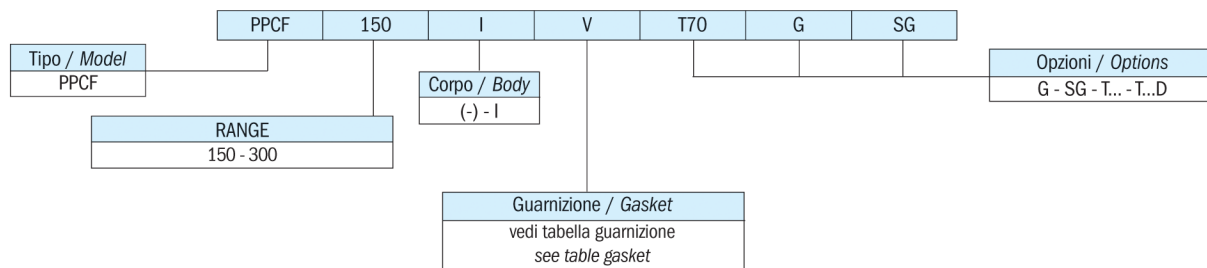

SPIEGAZIONE DELLE SIGLE DI ORDINAZIONE / ORDERING INFORMATION

Guarnizioni disponibili	-	NBR (standard)	-5°C...+90°C
	NT	HNBR	-25°C...+140°C
	V	FKM	-5°C...+90°C
	S	Silicone	-30°C...+120°C
Esecuzioni speciali	G	Contatti dorati per bassa corrente	
	T...	Taratura in salita al valore richiesto	
	T...D	Taratura in discesa al valore richiesto	
	I	Corpo in AISI 303	
	10A	Microinterruttore da 10 Ampere	
	L24	Con lampada 24V	
	L110	Con lampada 110V	
	L220	Con lampada 220V	
	SG	Sgrassati per ossigeno	

IN CONFORMITÀ ALLE NORME 2004/108 CE RELAZIONE EMC N° 147E/96.

Gaskets	-	NBR (standard)	-5°C to +90°C
	NT	HNBR	-25°C to +140°C
	V	FKM	-5°C to +90°C
	S	Silicon	-30°C +120°C
Options	G	Gold-plated contacts for low current	
	T...	Set-point adjustment rising at the required value	
	T...D	Set-point adjustment falling at the required value	
	I	AISI 303 stainless steel	
	10A	Microswitch for 10 A	
	L24	Connector with LED 24 V	
	L110	Connector with LED 110 V	
	L220	Connector with LED 220 V	
	SG	Degreased for applications with oxygen	

IN COMPLIANCE WITH 2004/108 CE RULES EMC N° 147E/96 REPORT.

CARATTERISTICHE GENERALI / GENERAL SPECIFICATIONS

TIPO MODEL	CAMPO DI LAVORO PRESSIONI RELATIVE ADJUSTMENT RELATIVE PRESSURE RANGE bar	DIMENSIONI DIMENSIONS mm				TOLLERANZA DI INTERVENTO A 25°C TOLERANCE AT 25° C bar	MAX. PRESS. STATICA SUPPORTABILE MAX STATIC PRESSURE bar	ESECUZIONE EXECUTION	PESO WEIGHT g
		A	B	C	D				
PPCF150	30-150	92	12	G 1/4" femmina female	72	± 7,0	600	Pistone Piston	295
PPCF300	150-300								