

SAPELEM

— créateur de solutions —


Polylobed series 81P

Best flexibility, Rigid holding

- Stop for part's positioning
- High flexibility of approach
- Parts to be turned up side down

Characteristics

81P.088

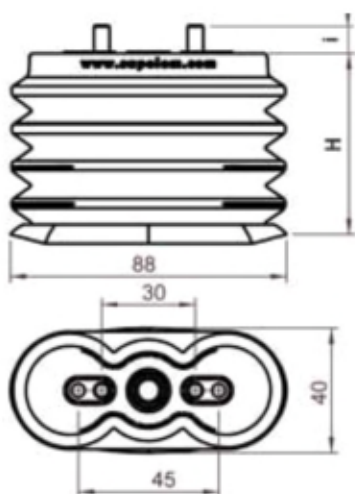



Lenght L	Width l	H	h	e (H-h)	i	Weight g
88	40	53	29	24	6	80
107	47	46	23	23	6	100

81P.107

2 vis M5 imperdables



These two suction cups also exist with selection flapper which allows to close the unused suction cup.

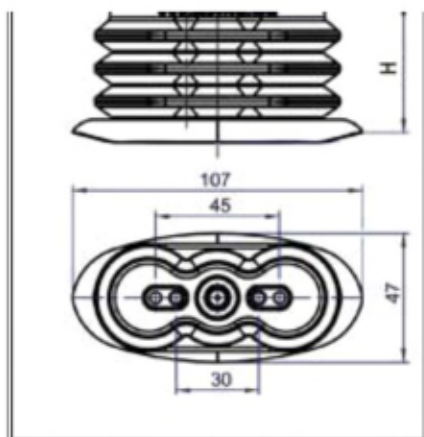

WLL in kg

Lenght	Nitrile
88	3,00
107	3,50

References

Lenght	Feeler	Nitrile
88	Oui	81P088.0M5.20.P
88	Non	81P088.0M5.20.0
107	Oui	81P107.0M5.20.P
107	Non	81P107.0M5.20.0


Without bellow series 81L



Best precision, Rigid holding




- High lifting capacity
- High production rate
- Parts to be turned up side down

Characteristics

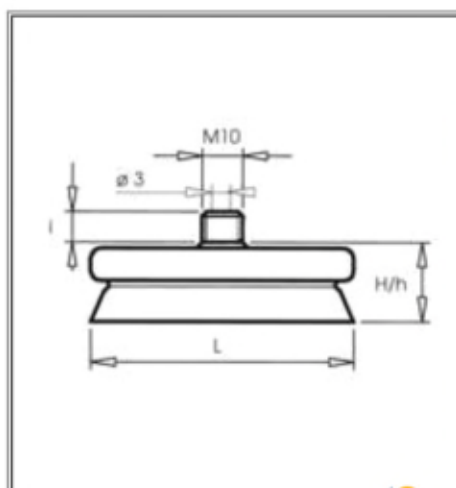

Lenght L	Width I	H	h	e (H-h)	i	Weight g
50	24	17,5	14	2,5	7,5	26
65	30	19,5	15	4,5	7,5	42

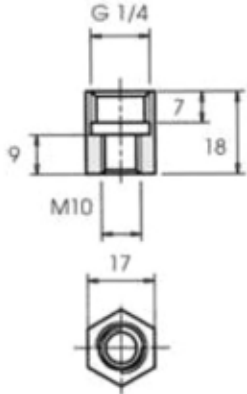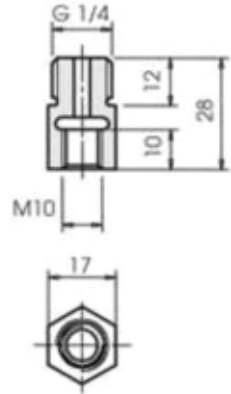

	Adaptor M10/1/4	
	8R.81.00F.14.1	8R.81.00M.14.1
		

WLL in kg

Lenght	Nitrile	Silicone
50	3,40	2,70
65	3,40	4,40

References

Lenght	Nitrile	Silicone
50	81.L050.20.M10.6	81.L050.10.M10.6
65	81.L065.20.M10.6	81.L065.10.M10.6


With bellow series 81S

	Flexibility of approach
	• Long and narrow products' handling • Flexibility • Cylindrical products' handling

Characteristics


Lenght L	Width l	H	h	e (H-h)	i	Volume in cm3	Weight in g
50	25	26	18	8	7,5	10	30
70	30	26	18	8	7,5	21	42



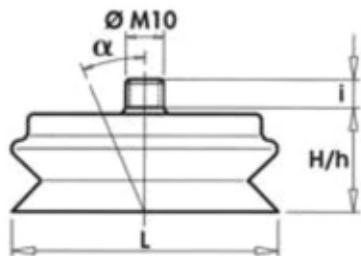


100	40	26	18	8	7,5	35	72
-----	----	----	----	---	-----	----	----

Lenght L	Width l	Angular capacity According to L	Angular capacity According to l	Max. Radius On generating line L	Max. Radius On circumference
50	25	21	30	25	50
70	30	16	25	50	100
100	40	11	20	80	250




Adaptor M10/1/4

8R.81.00F.14.1

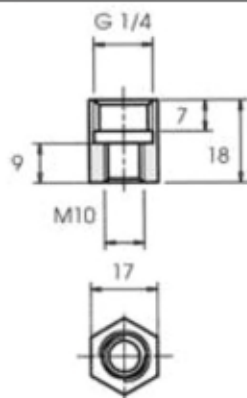

8R.81.00M.14.1

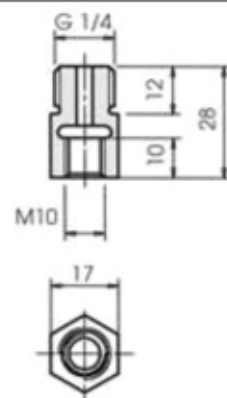




WLL in kg

Lenght	Nitrile	Silicone
50	3,40	2,70
70	4,20	3,60
100	6,40	-

References

Lenght	Nitrile	Silicone
50	81.S050.20.M10.6	81.S050.10.M10.6
70	81.S070.20.M10.6	81.S070.10.M.10.6
100	81.S100.20.M10.6	-





***Vous avez l'idée, nous la concrétisons.
Wij verheugen ons op uw aanvraag.
We look forward to your application.***



LDA Belgium

Hoge Buizen 53
1980 Eppegem
Belgium

Tel. +32 (0)2-266 13 13

Mail: LDA@LDA.be

www.LDA.be