



Function	Flow [max]	Manifold mounting	Series
3/2	Up to 0.24 Cv	Cartridge	BV314A

OPERATIONAL BENEFITS

1. Short stroke with high shifting forces
2. Balanced poppet, immune to pressure fluctuations
3. Precise repeatability
4. Solenoid isolated from contaminated air
5. Very few parts
6. Extremely long life
7. Unique mounting - no fasteners or screws required

How To Order

VALVE

Type	3-Way N.C.	3-Way universal valve
		
Cartridge	BV314A-CC1-00- xxxx-xxx	BV314A-CD1-00- xxxx-xxx

SOLENOID OPERATOR

X XX X - X XX

Solenoid	Voltage	Lead wire length	Solenoid can (round)	Solenoid cover
B Round	CA 24VDC (1.0W) CB 24VDC (1.8W) CC 24VDC (2.5W) CD 24VDC (3.0W) CE 24VDC (4.0W) CF 12VDC (1.0W) CG 12VDC (1.8W) CH 12VDC (2.5W) CJ 12VDC (3.0W) CK 12VDC (4.0W)	0* No lead wire A 18" B 24" C 36" D 48" E 72" F 96" H 144"	C For Top Cover Option and Can w/ Outer Threads	JST Pico Flying Leads TA BA No ground wire TC PC BC Blocking & suppr. diode & LED(no ground) TE PE BE Blocking & suppr. diode (no ground) TG PG BG LED (no ground) TJ PJ BJ MOV (no ground) TL PL BL LED & MOV (no ground) PN Transfer Board † GA MAC JAC Connector

*Not available for flying leads cover
Only option for Pico cover

Note: Pico covers PC-PL have a 3rd Pin which is a location pin

CIRCUIT BAR

Cyl. port size	Spacing (mm)	Side cylinder port	Bottom cylinder port
M7	17	CCMV14A-00ABA- xx	CCMV14A-00BBA- xx
1/8"	17	CCMV14A-00ABB- xx	CCMV14A-00BBB- xx
5/32 tube receptacle	17	CCMV14A-00ABC- xx	CCMV14A-00BBC- xx

xx = Number of stations

Note: for valves mounted to bar at factory, add -9 to model numbers.

† Requires special spacing - - consult factory

Note: Common inlet & exhaust are 1/4" NPTF

For BSPPL or BSPTR threads consult factory


Technical Data

Fluid:	Compressed air, vacuum, inert gases
Pressure range:	Vacuum to 120 PSI
Lubrication:	Not required, if used select a medium aniline point lubricant (between 180°F and 210°F)
Filtration:	40µ
Temperature range:	0°F to 120°F (-18°C to +50°C)
Flow (at 6 bar, Δ P=1bar):	Up to 0.24 Cv (4.0 W)
Voltage range:	-15% to +10% of nominal voltage


Tools: Manifold cavity step reamer: T-7321 • Insertion/removal socket: AT-1263 (Bit) AT-1185 (Bit Holder) AT-1264 (Handle)

Dimensions


Flying leads

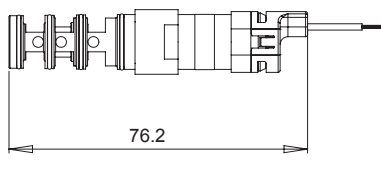





JST Connector

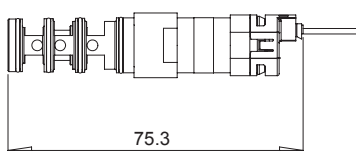

MAC Jac

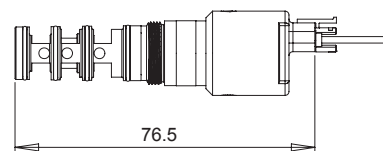




CCMV14A bar with BV314A valves

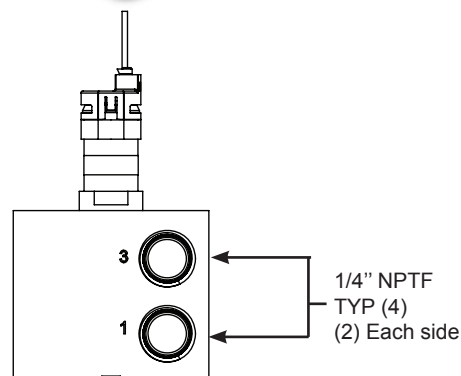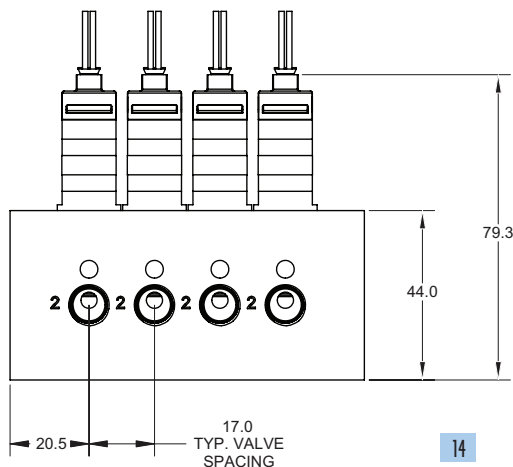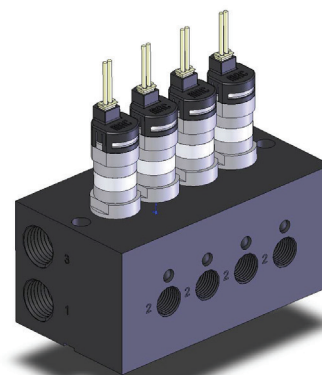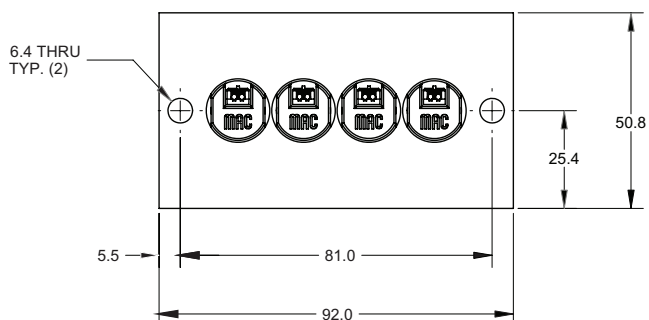



Connector Options

BV314




Flying Leads (BA)

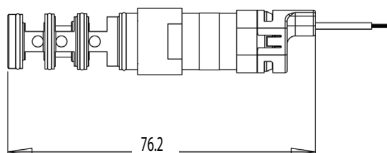



Flying Leads w/ LED (BC, BG, BL)

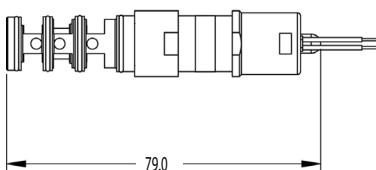



JST Connector (TA)

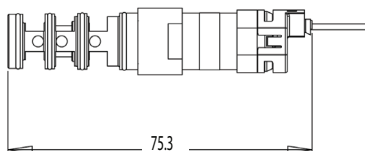



JST Connector w/ LED (TC, TG, TL)

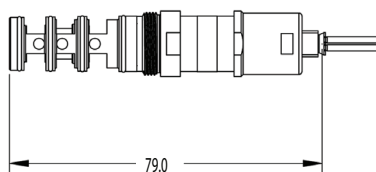

MAC Jac (GA)

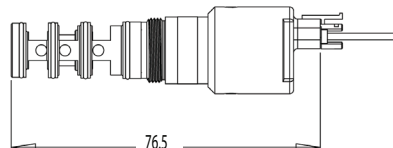

2 Pin PICO (PN)

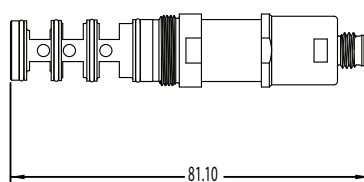

3 Pin PICO (PC, PE, PG, PJ, PL)

