



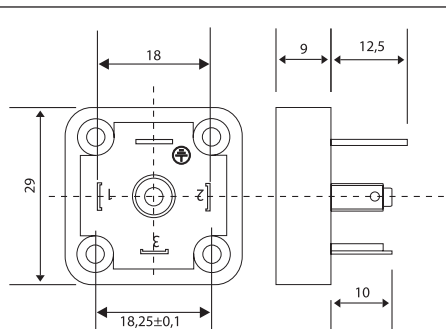

**A02
A03**

**A02 2F
A03 2F**




2P + 1 ≡ 3P + 1 ≡

Corpo connettore Connector Stecker	PA 66 + 30% FV
Sezione max conduttori Max cross section Max Leiterquerschnitt	1 mm ²
Tensione nominale (max.) Max voltage Max. Spannung	250 V AC
Portata massima contatti Max. current Max. Strom	16 A
Portata nominale contatti: Operating current: Betriebsstrom:	10 A
Temp. di funzionamento Working temperature Betriebstemperatur	-30 °C / +125 °C

Codici ordine/Codification/Bestellschlüssel

2P + 1 ≡ **A02**

3P + 1 ≡ **A03**

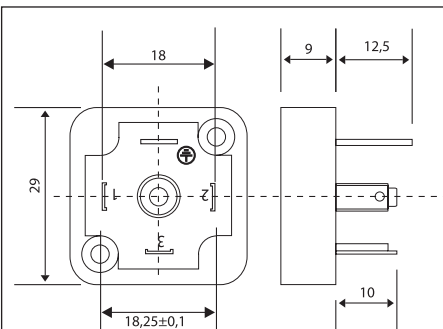

2P + 1 ≡ 3P + 1 ≡

Codici ordine/Codification/Bestellschlüssel



2P + 1 ≡ **A022F**

3P + 1 ≡ **A032F**



**AV02
AV03**

**AV02 2F
AV03 2F**

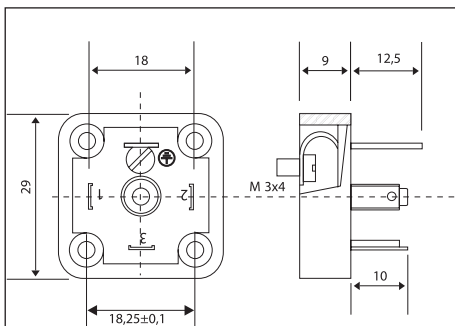


2P + 1 ≡ 3P + 1 ≡

Corpo connettore Connector Stecker	PA 66 + 30% FV
Sezione max conduttori Max cross section Max Leiterquerschnitt	1 mm ²
Tensione nominale (max.) Max voltage Max. Spannung	250 V AC
Portata massima contatti Max. current Max. Strom	16 A
Portata nominale contatti: Operating current: Betriebsstrom:	10 A
Temp. di funzionamento Working temperature Betriebstemperatur	-30 °C / +125 °C

Codici ordine/Codification/Bestellschlüssel

2P + 1 ≡ **AV02**

3P + 1 ≡ **AV03**

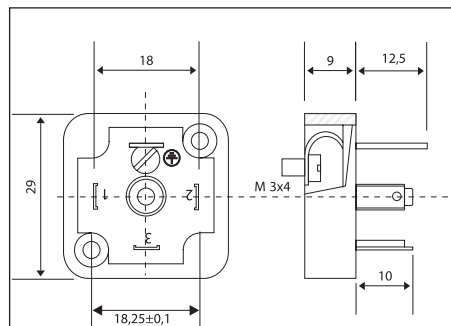

2P + 1 ≡ 3P + 1 ≡

Codici ordine/Codification/Bestellschlüssel

2P + 1 ≡ **AV022F**



3P + 1 ≡ **AV032F**

BASETTE



B02

BV02

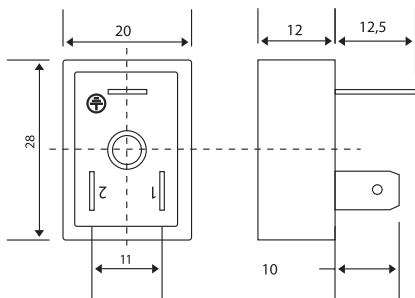


2P + 1 ⚡

Corpo connettore Connector Stecker	PA 66 + 30% FV
Sezione max conduttori Max cross section Max Leiterquerschnitt	1 mm ²
Tensione nominale (max.) Max voltage Max.Spannung	250 V AC
Portata massima contatti Max. current Max. Strom	16 A
Portata nominale contatti: Operating current: Betriebsstrom:	10 A
Temp. di funzionamento Working temperature Betriebstemperatur	-30 °C / +125 °C

Codici ordine/Codification/Bestellschlüssel

2P + 1 ⚡ **B02**

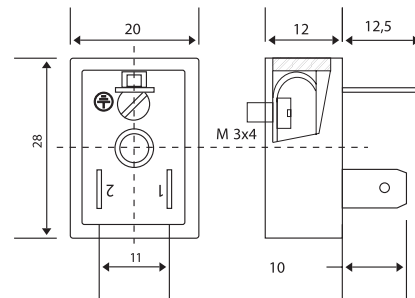

2P + 1 ⚡


Codici ordine/Codification/Bestellschlüssel

2P + 1 ⚡ **BV02**



**C06
C07**

**CR06OR
CR07OR**

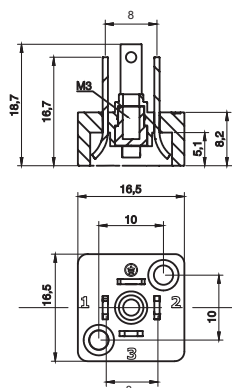


2P + 1 ⚡ 3P + 1 ⚡

Corpo connettore Connector Stecker	PA 66 + 30% FV
Sezione max conduttori Max cross section Max Leiterquerschnitt	0,75 mm ²
Tensione nominale (max.) Max voltage Max.Spannung	250 V AC
Portata massima contatti Max. current Max. Strom	10 A
Portata nominale contatti: Operating current: Betriebsstrom:	6 A
Temp. di funzionamento Working temperature Betriebstemperatur	-30 °C / +125 °C

Codici ordine/Codification/Bestellschlüssel

2P + 1 ⚡ **C06**

3P + 1 ⚡ **C07**

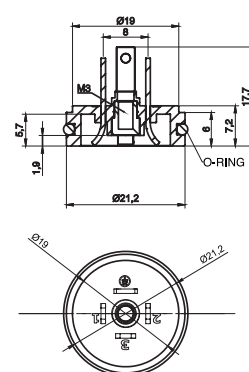


2P + 1 ⚡ 3P + 1 ⚡

Codici ordine/Codification/Bestellschlüssel


2P + 1 ⚡ **CR06OR**

3P + 1 ⚡ **CR07OR**

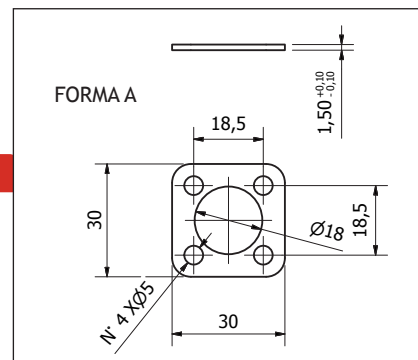


Codici ordine/Codification/Bestellschlüssel

GBAS-A

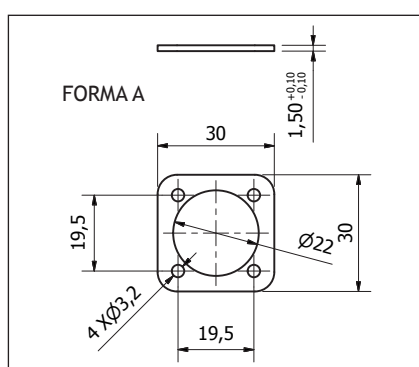


Codici ordine/Codification/Bestellschlüssel

GBAS-AC

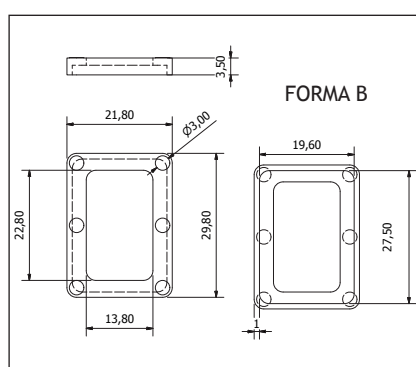

Codici ordine/Codification/Bestellschlüssel

GBAS-B

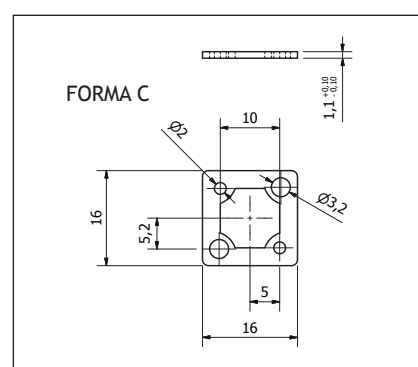

Codici ordine/Codification/Bestellschlüssel

GBAS-C