


Y M8-M12



Y4F8MF23

Y5MFF

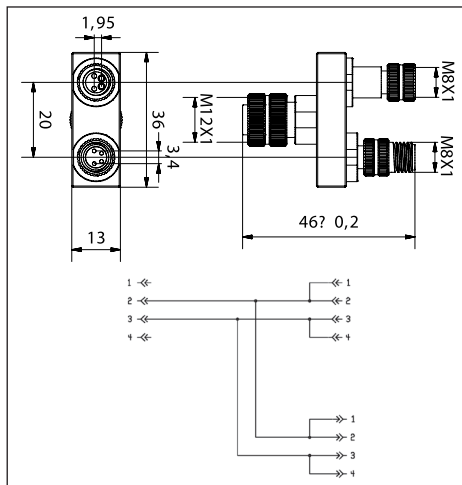


Scatola esterna Housing Gehäuse	Resina poliammidica (V0) PA Resin (V0) PA Harz (V0)
Contatti Contact material Kontaktmaterial	CuZn (Au)
Tensione nominale max: Max voltage Max. Spannung	60 V AC / 70 V DC
Portata max. contatti Max. current Max. Strom	4 A
Grado di protezione Protection class Schutzart	IP67 EN 60529 (DIN 40050)
Temp. di funzionamento Working temperature Betriebstemperatur	-25°C / +90°C
Ghiera di fissaggio Locking ring Nutmutter	CuZn (Ni)

Codici ordine/Codification/Bestellschlüssel

Y4F8MF2/3

O - Ring

NBR

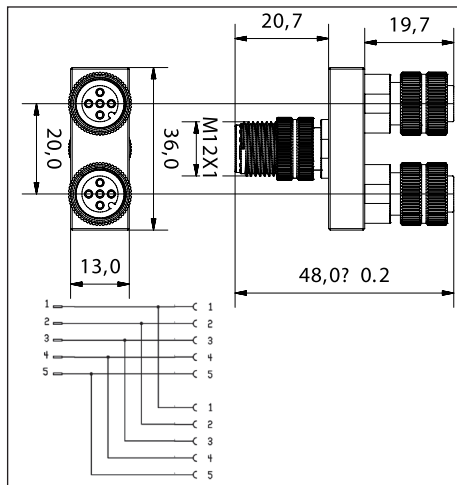


Codici ordine/Codification/Bestellschlüssel

Y5MFF



Y5MFFAB

Y5FMF

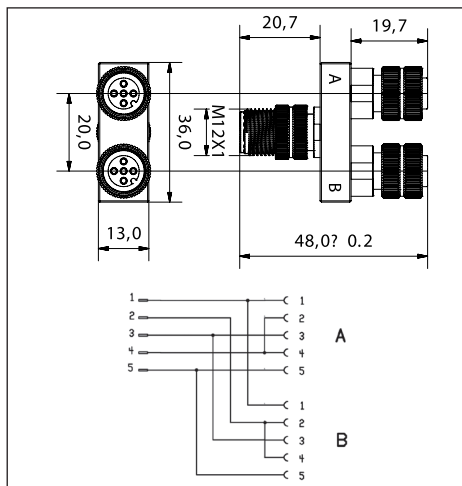


Scatola esterna Housing Gehäuse	Resina poliammidica (V0) PA Resin (V0) PA Harz (V0)
Contatti Contact material Kontaktmaterial	CuZn (Au)
Tensione nominale max: Max voltage Max. Spannung	60 V AC / 70 V DC
Portata max. contatti Max. current Max. Strom	4 A
Grado di protezione Protection class Schutzart	IP67 EN 60529 (DIN 40050)
Temp. di funzionamento Working temperature Betriebstemperatur	-25°C / +90°C
Ghiera di fissaggio Locking ring Nutmutter	CuZn (Ni)

Codici ordine/Codification/Bestellschlüssel

Y5MFFAB

O - Ring

NBR

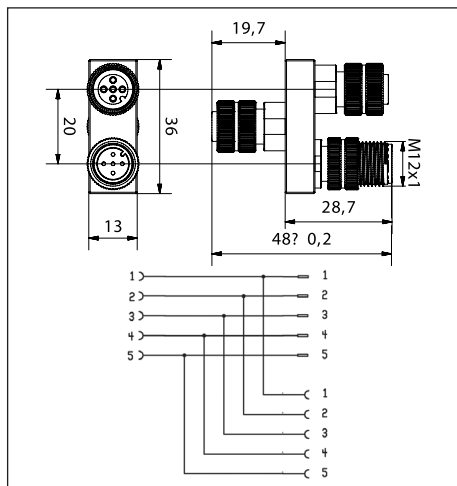

Codici ordine/Codification/Bestellschlüssel

Y5FMF