


CRS

Major Benefits

- Compact design for applications where space is limited
- Up to six switch slots for flush switch mounting
- Self-lubricating nitrile piston seal for long cylinder life
- Multiple mounting options
- Optional shock pads -BB in both directions add no length to cylinder, extend cylinder life, and minimize noise at end of piston travel

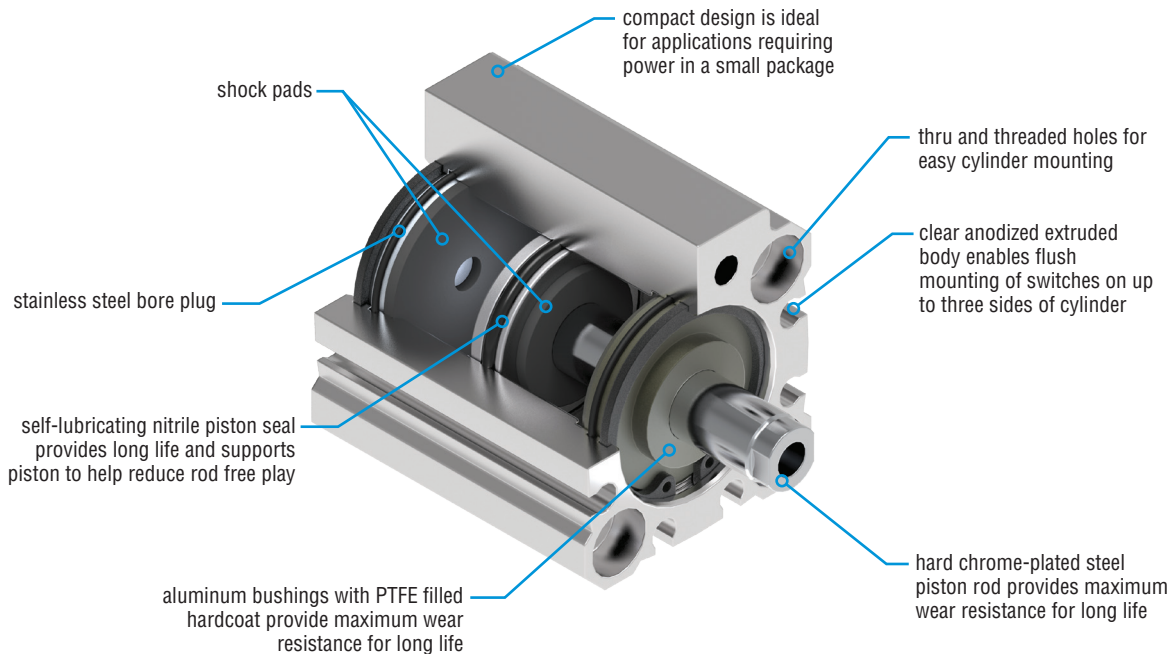


BEST PRACTICES FOR MAXIMUM CYLINDER LIFE

Shown are the best ways to apply PHD Series CRS Cylinders. The key to proper application and long cylinder life is using the cylinder to provide power and motion while externally stopping any attached loads.

APPLICATION #1 - ATTACHED LOAD


Loads connected to the cylinder rod must always be stopped externally. Strokes, rod lengths, and attached loads should be designed so that the piston never impacts the head or cap. For vertical applications only.

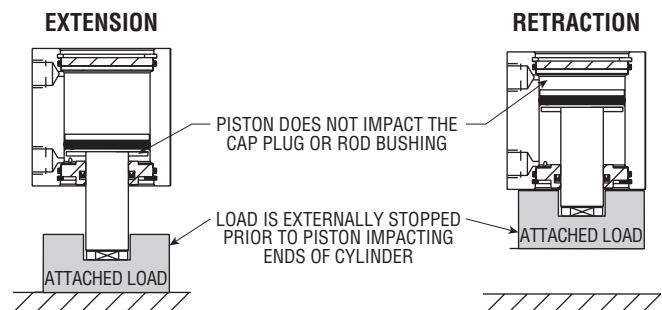

ORDERING DATA: Series CRS Cylinders

TO ORDER SPECIFY:

Product, Series, Type, Design No.,
Mounting Style, Bore Size, Stroke, and Options.

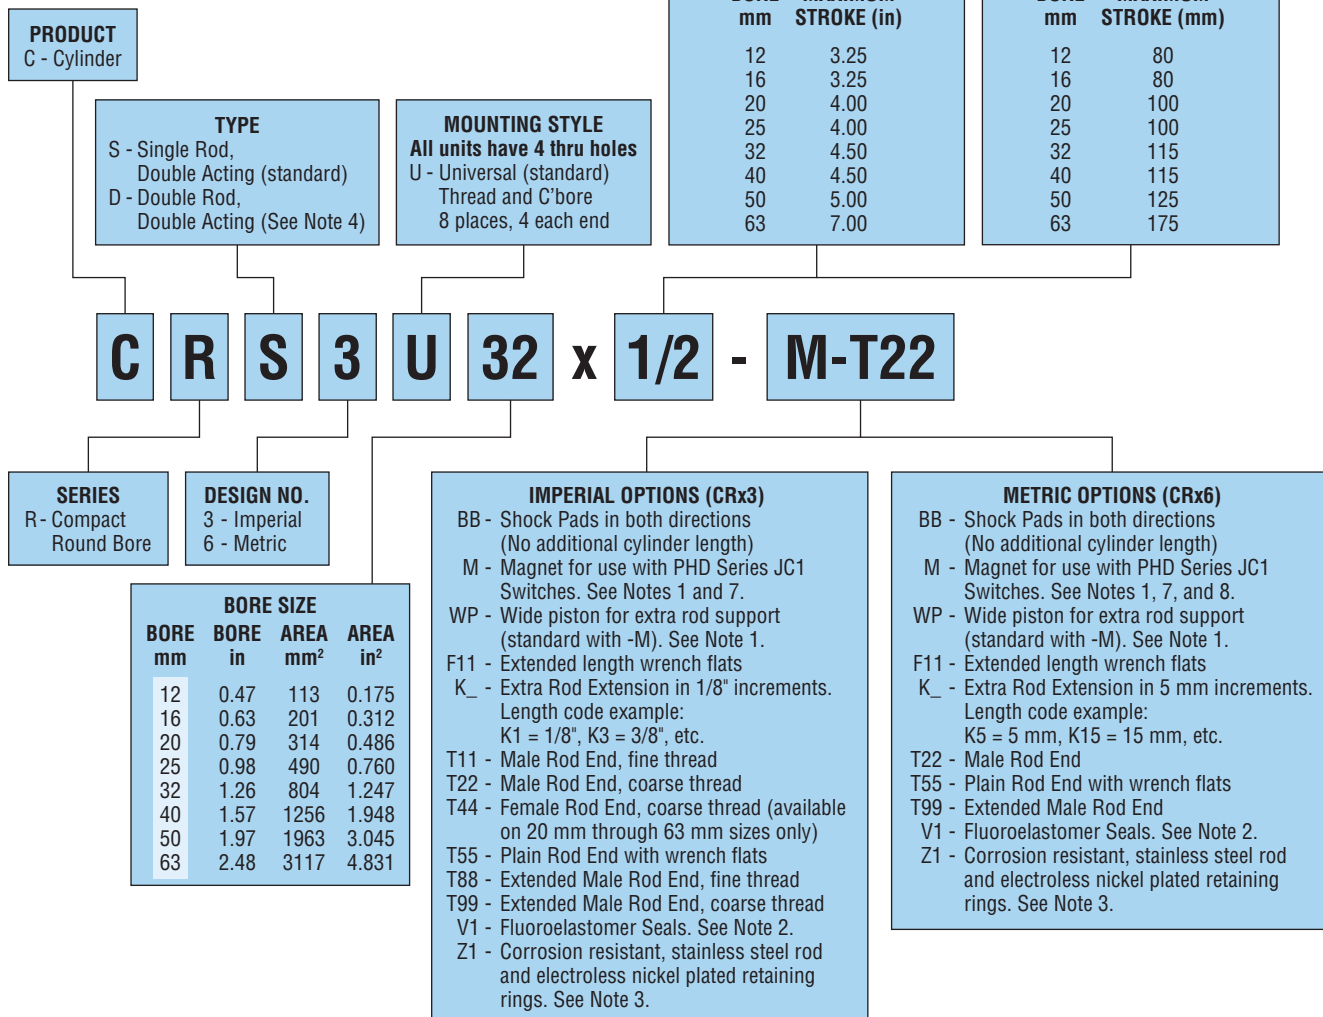

SERIES JC1 MAGNETIC SWITCHES

JC1 SWITCH	DESCRIPTION
JC1SDN-5	NPN DC Solid State, 5 meter cable
JC1SDP-5	PNP DC Solid State, 5 meter cable
JC1SDN-K	NPN DC Solid State, Quick Connect
JC1SDP-K	PNP DC Solid State, Quick Connect
JC1RDU-5	PNP or NPN DC Reed, 5 meter cable
JC1RDU-K	PNP or NPN DC Reed, Quick Connect
JC1ADU-K	AC Reed, Quick Connect

NOTE: See Switches and Sensors section for additional switch information and complete specification. Switches must be ordered separately.

CORDSETS FOR SERIES JC1 SWITCHES

PART NO.	DESCRIPTION
63549-02	M8, 3 pin, Straight Female Connector, 2 meter cable
63549-05	M8, 3 pin, Straight Female Connector, 5 meter cable
81284-1-010	M12, 4 pin, Straight Female Connector, 2 meter cable

NOTE: Cordsets are ordered separately.

NOTES:

- Options -M and -WP add 1/4" [6.38 mm] to the overall length.
- Option -V1 may reduce cylinder lifespan due to fluorocarbon seal material.
- Option -Z1 may reduce cylinder lifespan due to stainless steel rod in place of chrome plated steel.
- Double rod units' rear rod will receive same rod option as single rod.
- For longer stroke lengths available, consult PHD.
- See pages 14 to 17 for accessories.
- PHD recommends the use of stainless steel or de-magnetized fasteners on units with the -M option.
- See options pages for switch ordering information.



Options may affect unit length. See dimensional pages and option information details.

CAD & Sizing Assistance

Use PHD's free online Product Sizing and
CAD Configurator at phdinc.com/myphd

SPECIFICATIONS	SERIES CRS
OPERATING PRESSURE	10 psi min to 150 psi max at zero load [0.7 bar min to 10 bar max] air
STROKE TOLERANCE	± 0.031 inch [± 0.8 mm] (See Shock Pad Usage)
TEMPERATURE LIMITS	-20° to +180°F [-29° to +82°C]
VELOCITY	20 in/sec [0.5 m/sec] typical min, zero load at 100 psi [7 bar]
LIFE EXPECTANCY	70 million linear inches [1.77 million linear meters] minimum at operating temperatures under 120°F [49°C] (-V1 & -Z1 options may reduce life)
LUBRICATION	Pre-lubricated for use with non-lubricated or lubricated air
MAINTENANCE	Field repairable

CYLINDER FORCE AND WEIGHT

BORE SIZE		ROD DIAMETER		ROD DIRECTION	EFFECTIVE AREA		BASE WEIGHT		ADDER PER 1" [25 mm] OF STROKE	
mm	in	in	mm		in ²	mm ²	lb	kg	lb	kg
12	0.472	0.250	6.35	EXTEND	0.175	113	0.11	0.05	0.085	0.04
				RETRACT	0.126	81				
16	0.630	0.250	6.35	EXTEND	0.312	201	0.17	0.08	0.10	0.05
				RETRACT	0.263	169				
20	0.787	0.375	9.53	EXTEND	0.487	314	0.25	0.11	0.15	0.07
				RETRACT	0.376	242				
25	0.984	0.375	9.53	EXTEND	0.761	490	0.26	0.12	0.16	0.07
				RETRACT	0.650	419				
32	1.260	0.625	15.88	EXTEND	1.247	804	0.48	0.22	0.26	0.12
				RETRACT	0.940	606				
40	1.575	0.625	15.88	EXTEND	1.948	1256	0.60	0.27	0.30	0.14
				RETRACT	1.641	1058				
50	1.969	0.750	19.05	EXTEND	3.043	1963	0.78	0.35	0.40	0.18
				RETRACT	2.602	1678				
63	2.480	0.750	19.05	EXTEND	4.832	3117	0.95	0.43	0.48	0.22
				RETRACT	4.390	2832				

NOTE: Use retract figures for calculating double rod cylinder forces in both directions.

CYLINDER FORCE CALCULATIONS

	Imperial	Metric
	F = P x A	F = 0.1 x P x A
F = Cylinder Force	lbs	N
P = Operating Pressure	psi	bar
A = Effective Area (Extend or Retract)	in ²	mm ²

APPLICATION

The PHD Series CRS Cylinders are designed for use as a source of power and motion. As with typical compact cylinders, the Series CRS Cylinder is not intended for applications where side loads or impact with attached loads are present. PHD recommends the use of external stops to ensure maximum cylinder life. See best application practices on page 6.


SHOCK PAD USAGE

Optional shock pads are recommended for applications where the piston travels the full stroke length and contacts the bushing and plug (with no attached loads). The use of shock pads reduces noise and provides maximum cylinder life in these applications. Stroke tolerance changes to ±0.050 [±1.3 mm] with -BB option.


Application & Sizing Assistance

Use PHD's free online Product Sizing and Application at www.phdinc.com/apps/sizing

12 mm and 16 mm BORE

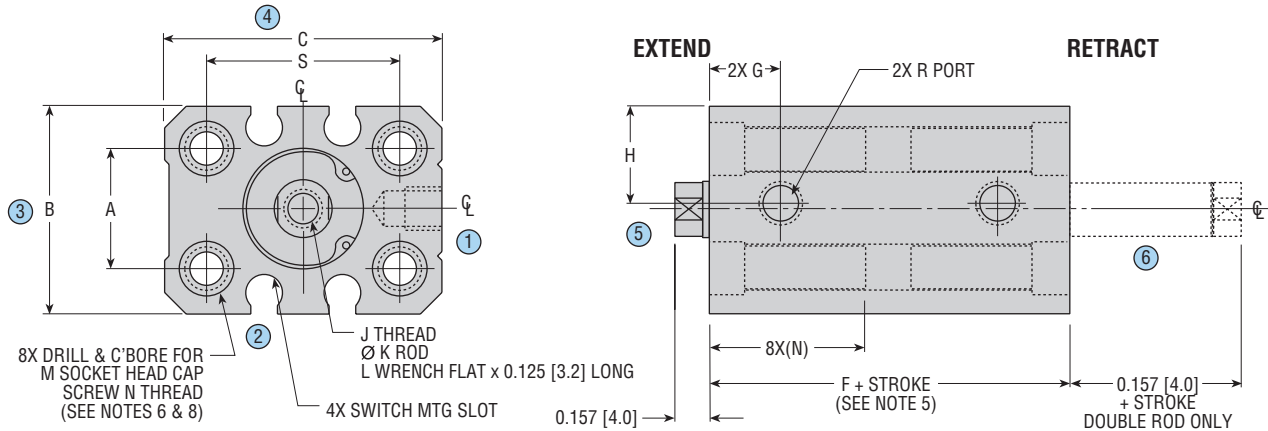

20 mm through 63 mm BORE

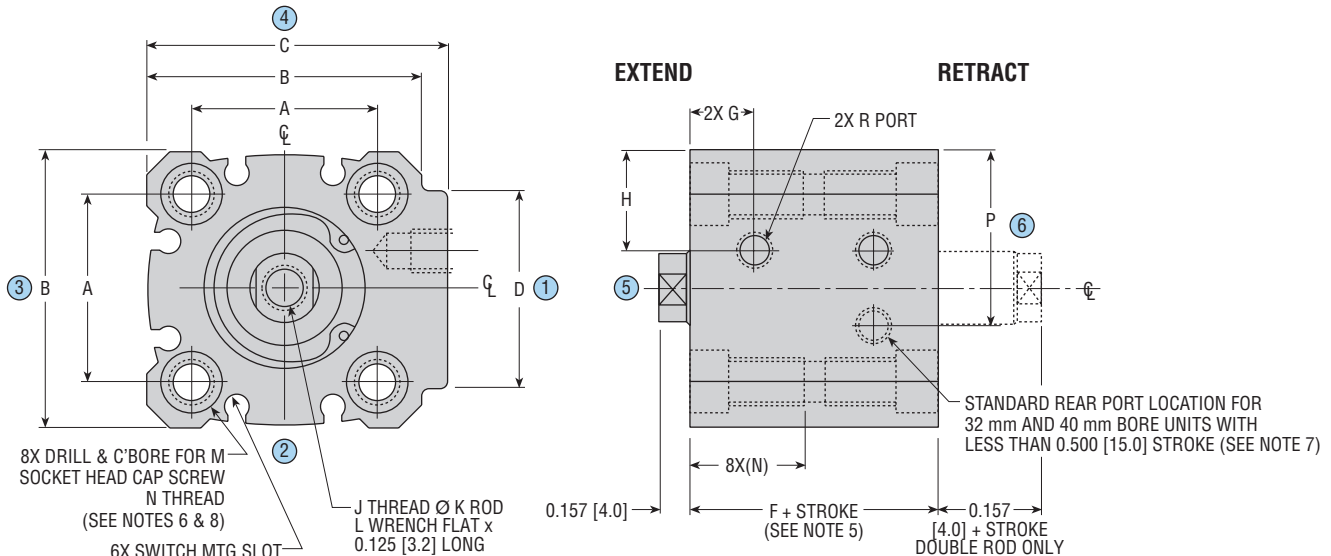

NOTES:

- 1) DIMENSIONS SHOWN IN [] ARE IN mm FOR METRIC UNITS [CRx6]
- 2) DESIGNATED CENTERLINE IS CENTERLINE OF CYLINDER BORE
- 3) UNLESS OTHERWISE DIMENSIONED, MOUNTING HOLE PATTERNS AND OTHER FEATURES ARE CENTERED ON DESIGNATED CYLINDER CENTERLINE
- 4) 1/4" [5 mm] MINIMUM STROKE REQUIRED
- 5) SEE DIMENSION CHART ON NEXT PAGE. DIMENSION F IS DIFFERENT FOR "PLAIN" UNIT AND WITH OPTIONS -M AND -WP.
- 6) C'BORE DEPTH OF MOUNTING HOLES MUST BE CONSIDERED TO DETERMINE PROPER MOUNTING FASTENER LENGTH
- 7) FOR 32 mm AND 40 mm BORE UNITS WITH STROKES LESS THAN 0.500" [15 mm], PHD RECOMMENDS THE USE OF FITTINGS WITH A HEX NO LARGER THAN 7/16" [13 mm] AND NOTE REAR PORT LOCATION CHANGE
- 8) PHD RECOMMENDS THE USE OF STAINLESS STEEL OR DE-MAGNETIZED FASTENERS ON UNITS WITH THE -M OPTION.

DIMENSIONS: Series CRS Cylinders

BORE	LETTER DIMENSION											
	A	B	C	D	F PLAIN	F WITH OPTIONS -M, -WP	G	H	J THREAD	K	L	M
0.472 [12]	0.550 [13.97]	0.944 [24.0]	1.260 [32.0]	—	0.904 [23.0]	1.154 [29.4]	0.325 [8.26]	0.472 [12.0]	8-32 x 0.250 [M4 x 0.7 x 6]	0.250 [6.35]	0.219 [5.6]	#6 [M4]
0.630 [16]	0.710 [18.03]	1.104 [28.0]	1.340 [34.0]	—	0.904 [23.0]	1.154 [29.4]	0.325 [8.26]	0.454 [11.5]	8-32 x 0.250 [M4 x 0.7 x 6]	0.250 [6.35]	0.219 [5.6]	#6 [M4]
0.787 [20]	1.000 [25.4]	1.476 [37.5]	1.576 [40.0]	0.788 [20.0]	0.920 [23.4]	1.170 [29.7]	0.350 [8.89]	0.531 [13.5]	1/4-28 x 0.375 [M6 x 1.0 x 9]	0.375 [9.53]	0.312 [7.9]	#10 [M5]
0.984 [25]	1.100 [28.0]	1.576 [40.0]	1.746 [44.4]	1.000 [25.4]	0.920 [23.4]	1.170 [29.7]	0.350 [8.89]	0.552 [14.0]	1/4-28 x 0.375 [M6 x 1.0 x 9]	0.375 [9.53]	0.312 [7.9]	#10 [M5]
1.260 [32]	1.339 [34.0]	1.870 [47.5]	2.037 [52.0]	1.340 [34.0]	1.022 [26.0]	1.272 [32.3]	0.375 [9.53]	0.610 [15.5]	5/16-24 x 0.470 [M8 x 1.25 x 11]	0.625 [15.88]	0.500 [12.7]	#10 [M5]
1.575 [40]	1.575 [40.0]	2.205 [56.0]	2.363 [60.0]	1.420 [36.0]	1.022 [26.0]	1.272 [32.3]	0.360 [9.14]	0.738 [18.8]	5/16-24 x 0.470 [M8 x 1.25 x 11]	0.625 [15.88]	0.500 [12.7]	#10 [M5]
1.969 [50]	1.969 [50.0]	2.598 [66.0]	2.795 [71.0]	1.600 [40.6]	1.300 [33.0]	1.550 [39.4]	0.472 [12.00]	0.823 [21.0]	3/8-24 x 0.563 [M10 x 1.5 x 13]	0.750 [19.05]	0.625 [15.9]	1/4 [M6]
2.480 [63]	2.362 [60.0]	3.070 [78.0]	3.266 [83.0]	2.094 [53.2]	1.420 [36.0]	1.670 [42.4]	0.512 [13.00]	0.865 [22.0]	3/8-24 x 0.563 [M10 x 1.5 x 13]	0.750 [19.05]	0.625 [15.9]	1/4 [M6]

BORE	LETTER DIMENSION			
	N THREAD	P	R	S
0.472 [12]	10-24 x 0.550 [M5 x 0.8 x 14.5]	—	10-32 x 0.15 [M5 x 0.8 x 4]	0.866 [22.0]
0.630 [16]	10-24 x 0.550 [M5 x 0.8 x 14.5]	—	10-32 x 0.15 [M5 x 0.8 x 4]	0.946 [24.0]
0.787 [20]	1/4-20 x 0.875 [M6 x 1.0 x 22.5]	—	10-32 x 0.15 [M5 x 0.8 x 4]	—
0.984 [25]	1/4-20 x 0.875 [M6 x 1.0 x 22.5]	—	10-32 x 0.15 [M5 x 0.8 x 4]	—
1.260 [32]	1/4-20 x 0.875 [M6 x 1.0 x 22.5]	0.900 [22.9]	1/8 NPT [1/8 BSP]	—
1.575 [40]	1/4-20 x 0.875 [M6 x 1.0 x 22.5]	1.072 [27.2]	1/8 NPT [1/8 BSP]	—
1.969 [50]	5/16-18 x 0.900 [M8 x 1.25 x 22.5]	—	1/8 NPT [1/8 BSP]	—
2.480 [63]	5/16-18 x 0.900 [M8 x 1.25 x 22.5]	—	1/4 NPT [1/4 BSP]	—

Numbers in [] are in mm for metric units [CRx6].

CAD & Sizing Assistance


Use PHD's free online Product Sizing and CAD Configurator at phdinc.com/myphd

All dimensions are reference only unless specifically tolerated.

BB

SHOCK PADS ON EXTENSION AND RETRACTION

Shock pads eliminate metal-to-metal contact and minimize piston impact. Shock pads are recommended for applications where the piston travels the full stroke length and contacts the head and/or cap (with no attached loads). The use of shock pads reduces noise and provides maximum cylinder life in these applications.

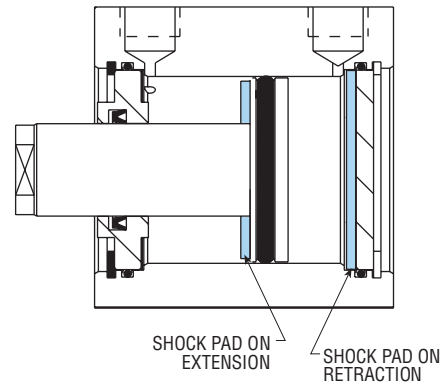


F11

EXTENDED LENGTH WRENCH FLATS

The design of a compact cylinder requires the length to be as short as possible. The standard wrench flat length is 0.125" [3 mm]. The option -F11 provides wrench flats which allow standard wrench access.

BORE [mm]	A EXTENDED WRENCH FLATS		B ROD EXTENSION	
12/16	0.200	[5.08]	0.250	[6.5]
20/25	0.200	[5.08]	0.250	[6.5]
32/40	0.290	[8.00]	0.344	[9.0]
50/63	0.290	[8.00]	0.344	[9.0]

Numbers in [] are in mm for metric units [CRx6].

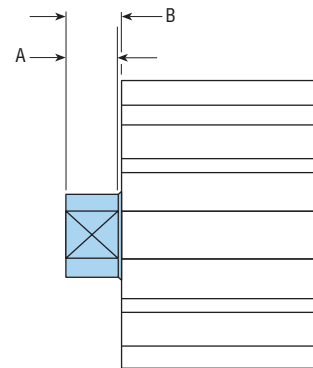

K_

EXTRA ROD EXTENSION

Extra rod extension can be achieved by specifying the option -K followed by the length code.

Length code example (for imperial CRx3 units)

K1 = 1/8" of extra rod extension


K3 = 3/8", etc.

Length code example (for metric CRx6 units)

K5 = 5 mm of extra rod extension

K15 = 15 mm, etc.

0.157" [4 mm] of rod extension is standard. Available in 1/8" [5 mm] increments only.

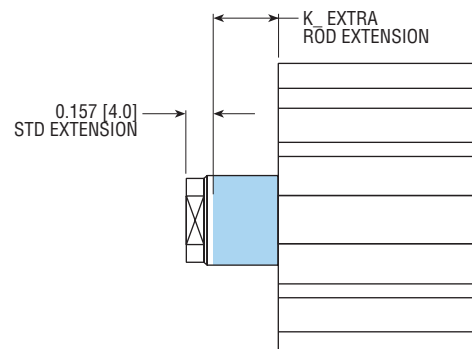

CAD & Sizing Assistance

Use PHD's free online Product Sizing and CAD Configurator at phdinc.com/myphd


All dimensions are reference only unless specifically toleranced.

M

MAGNETIC PISTON FOR SERIES JC1 SWITCHES

This option equips the cylinder with a magnetic band on the piston for use with PHD Series JC1 Switches. These switches mount easily into the integral slots in the body. **Hand tighten the setscrew until the switch is securely retained. Do not overtighten.** PHD recommends the use of stainless steel or de-magnetized fasteners on units with this option.

NOTE: Option -M adds 0.250 in [6.38 mm] to the overall length of the cylinder of a plain unit.



SERIES JC1 MAGNETIC SWITCHES

JC1 SWITCH	DESCRIPTION
JC1SDN-5	NPN DC Solid State, 5 meter cable
JC1SDP-5	PNP DC Solid State, 5 meter cable
JC1SDN-K	NPN DC Solid State, Quick Connect
JC1SDP-K	PNP DC Solid State, Quick Connect
JC1RDU-5	PNP or NPN DC Reed, 5 meter cable
JC1RDU-K	PNP or NPN DC Reed, Quick Connect
JC1ADU-K	AC Reed, Quick Connect

NOTE: See Switches and Sensors section for additional switch information and complete specification. Switches must be ordered separately.

CORDSETS FOR SERIES JC1 SWITCHES

PART NO.	DESCRIPTION
63549-02	M8, 3 pin, Straight Female Connector, 2 meter cable
63549-05	M8, 3 pin, Straight Female Connector, 5 meter cable
81284-1-010	M12, 4 pin, Straight Female Connector, 2 meter cable

NOTE: Cordsets are ordered separately.

WP

WIDE PISTON FOR EXTRA ROD END SUPPORT

This option provides additional rod end stability. All units with magnetic pistons will automatically receive a wide piston to accommodate the magnet.

NOTE: Option -WP, adds 0.250 in [6.38 mm] to the overall length of the cylinder of a plain unit.

V1

FLUOROELASTOMER SEALS

Fluoroelastomer seals are compatible with certain fluids which degrade standard Nitrile seals. Seal compatibility should be checked with the fluid manufacturer for correct application. Consult PHD for high temperature use.

T11 MALE ROD END, FINE THREAD (Not available on CRx6 units)


T22 MALE ROD END, COARSE THREAD

These options provide a studded male rod end in place of the standard female threaded rod end. The metric CRS is available with coarse threads only. See pages 9 and 10 for specifications of standard rod ends.

BORE [mm]	-T11 FINE A THREAD	-T22 COARSE A THREAD	B	
12/16	N/A	8-32	[M4 x 0.7]	0.325 [8.5]
20/25	1/4-28	1/4-20	[M6 x 1.0]	0.580 [14.9]
32/40	5/16-24	5/16-18	[M8 x 1.25]	0.625 [17.5]
50/63	3/8-24	3/8-16	[M10 x 1.5]	0.810 [20.5]

NOTES:

- 1) Numbers in [] are in mm for metric units [CRx6].
- 2) On double rod units, rear rod receives same rod end as single rod.

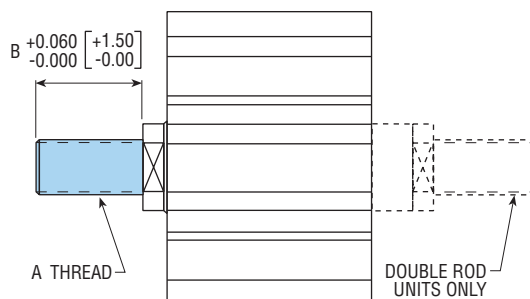


T44 FEMALE ROD END, COARSE THREAD (CRx3 20-63 units only)

This option provides a female coarse thread rod end. This option can be applied to imperial 20 mm through 63 mm bore units. The imperial 12 mm and 16 mm bore units have an 8-32 coarse thread as standard. See pages 9 and 10 for standard thread sizes. The metric 12 mm through 63 mm bore units have coarse threads as standard.

BORE [mm]	-T44 COARSE			
	A THREAD		B	
12/16	(STD)	(STD)	(STD)	(STD)
20/25	1/4-20	(STD)	0.375	(STD)
32/40	5/16-18	(STD)	0.470	(STD)
50/63	3/8-16	(STD)	0.562	(STD)


NOTE: On double rod units, rear rod receives same rod end as single rod.

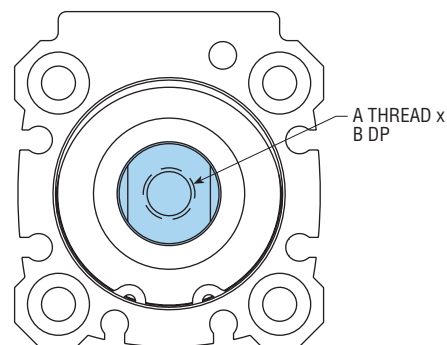

T55 PLAIN ROD END

This option provides a plain rod end with wrench flats. Standard PHD Compact Cylinders are supplied with a female rod end.

NOTE: On double rod units, rear rod receives same rod end as single rod.



OPTIONS: Series CRS Cylinders


T88

**EXTENDED MALE ROD END,
FINE THREAD**
(Not available on CRx6 units)

T99

**EXTENDED MALE ROD END,
COARSE THREAD**

These options provide a studded male rod end with extended length threads. Metric CRS units are available with coarse threads only. See previous page for standard length male rod end options.

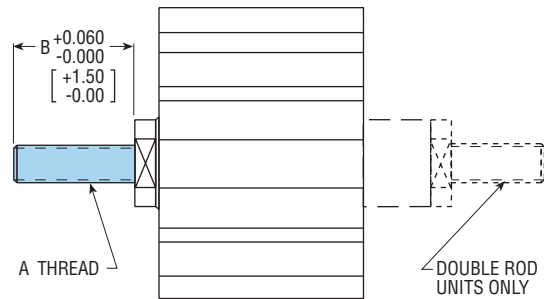

BORE [mm]	-T88 FINE A THREAD	-T99 COARSE A THREAD	B
12/16	N/A	8-32 [M4 x 0.7]	0.700 [17.5]
20/25	1/4-28	1/4-20 [M6 x 1.0]	1.200 [29.5]
32/40	5/16-24	5/16-18 [M8 x 1.25]	1.250 [32.5]
50/63	3/8-24	3/8-16 [M10 x 1.5]	1.690 [35.5]

NOTES:

- 1) Numbers in [] are in mm for metric units [CRx6].
- 2) On double rod units, rear rod receives same rod end as single rod.

Z1


CORROSION RESISTANT

Electroless nickel plating is applied to the retaining rings and a stainless steel piston rod is supplied. Male rod ends are not plated when this option is specified. This option may reduce seal life.

ACCESSORIES: Series CRS Cylinders

HEXAGONAL NUT KIT

Nut kits include a hexagonal nut for use with male studded rod ends. All male rod end options are shipped without hexagonal nuts.

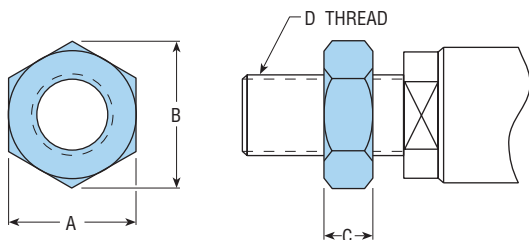


BORE [mm]	DIMENSIONS			D THREAD FINE	KIT NO.	D THREAD COARSE	KIT NO. COARSE
	A	B	C				
12/16	0.335 [7.0]	0.385 [7.7]	0.125 [2.2]	N/A [N/A]	N/A [N/A]	8-32 [M4 x 0.7]	1972-039 [3204-035]
20/25	0.432 [10.0]	0.487 [11.0]	0.157 [3.2]	1/4-28 [N/A]	1972-015 [N/A]	1/4-20 [M6 x 1.0]	1972-014 [3204-001]
32/40	0.500 [13.0]	0.577 [14.4]	0.187 [4.0]	5/16-24 [N/A]	1972-017 [N/A]	5/16-18 [M8 x 1.25]	1972-016 [3204-002]
50/63	0.562 [17.0]	0.650 [18.9]	0.215 [5.0]	3/8-24 [N/A]	1972-019 [N/A]	3/8-16 [M10 x 1.5]	1972-018 [3204-025]


NOTE: Numbers in [] are in mm for metric units [CRx6].

All dimensions are reference only unless specifically tolerated.

CYLINDER PIVOT KIT

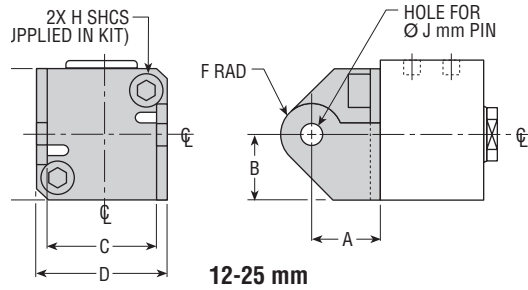

12-25 mm

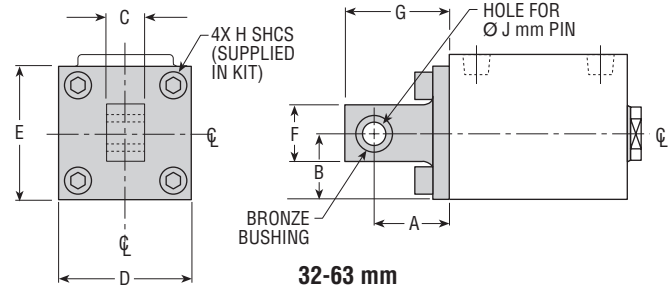

32-63 mm


BORE [mm]	DIMENSIONS									KIT NO. IMPERIAL CRx3	KIT NO. METRIC CRx6
	A	B	C	D	E	F	G	H	Ø J		
12	0.650 [16.5]	0.638 [16.2]	0.905 [23.00]	1.064 [27.0]	1.276 [32.4]	0.281 [7.1]	—	10-24 [M5 x 0.8]	0.197 [5.0]	60278-1	60286-1
16	0.650 [16.5]	0.678 [17.2]	0.905 [23.00]	1.064 [27.0]	1.356 [34.4]	0.281 [7.1]	—	10-24 [M5 x 0.8]	0.197 [5.0]	60279-1	60287-1
20	0.790 [20.1]	0.750 [19.0]	1.250 [31.75]	1.500 [38.1]	1.500 [38.1]	0.355 [9.0]	—	1/4-20 [M6 x 1.0]	0.236 [6.0]	60280-1	60288-1
25	0.790 [20.1]	0.800 [20.3]	1.250 [31.75]	1.500 [38.1]	1.600 [40.6]	0.355 [9.0]	—	1/4-20 [M6 x 1.0]	0.236 [6.0]	60281-1	60289-1
32	1.065 [27.0]	0.935 [23.8]	0.490 [12.45]	1.870 [47.5]	1.870 [47.5]	0.820 [21.0]	1.475 [37.5]	1/4-20 [M6 x 1.0]	0.394 [10.0]	60282-1	60290-1
40	1.065 [27.0]	1.105 [28.1]	0.490 [12.45]	2.210 [56.1]	2.210 [56.1]	0.820 [21.0]	1.475 [37.5]	1/4-20 [M6 x 1.0]	0.394 [10.0]	60283-1	60291-1
50	1.460 [37.1]	1.300 [33.0]	0.600 [15.24]	2.600 [66.0]	2.600 [66.0]	1.000 [25.4]	1.970 [50.0]	5/16-18 [M8 x 1.25]	0.472 [12.0]	60284-1	60292-1
63	1.460 [37.1]	1.500 [38.1]	0.600 [15.24]	3.000 [76.2]	3.000 [76.2]	1.000 [25.4]	1.970 [50.0]	5/16-18 [M8 x 1.25]	0.472 [12.0]	60285-1	60293-1

Numbers in [] are in mm for metric units [CRx6].


NOTES:

- 1) 12-25 mm IS BRITE ZINC PLATED STEEL
- 2) 32-63 mm IS ANODIZED ALUMINUM WITH LUBRICATED BRONZE BUSHINGS
- 3) FULCRUM PIN NOT INCLUDED (SEE "FULCRUM PIN KITS" TO PURCHASE)
- 4) DESIGNATED CENTERLINE ϕ IS CENTERLINE OF CYLINDER.
- 5) UNLESS OTHERWISE DIMENSIONED, FEATURES ARE CENTERED ON CYLINDER CENTERLINE.

BASE PIVOT KIT

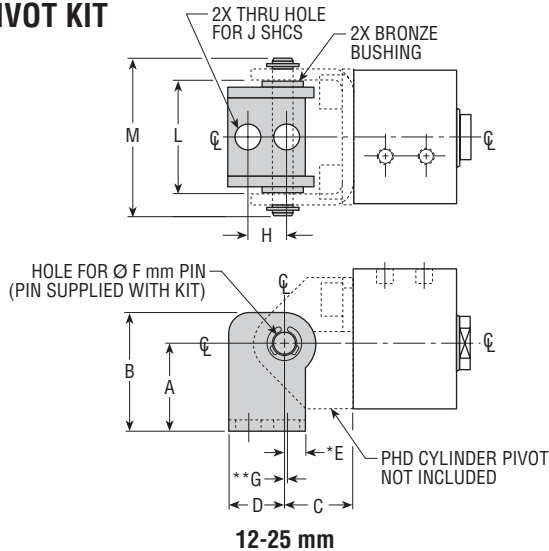

12-25 mm

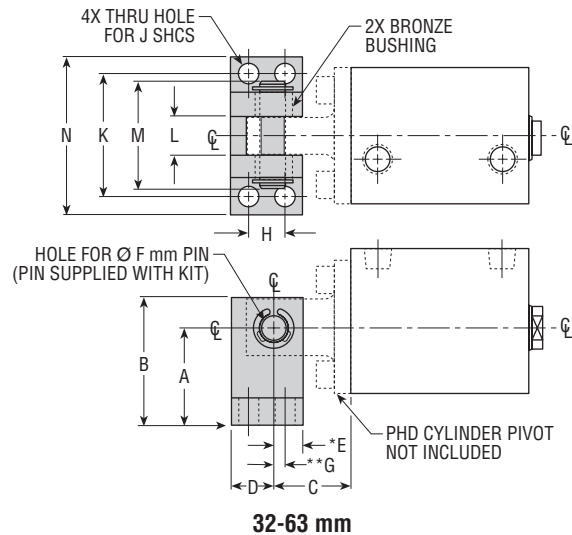

32-63 mm

BORE [mm]	DIMENSIONS												KIT: CRx3x, CRx6x IMPERIAL/METRIC
	A	B	C	D	E	Ø F	G	H	J	K	L	M	
12/16	0.865 [22.0]	1.145 [29.0]	0.650 [16.5]	0.490 [12.5]	0.220 [5.6]	0.197 [5.0]	0.060 [1.5]	0.375 [9.5]	#10 [M5]	—	0.877 [22.3]	1.300 [33.0]	60294-1
20/25	1.000 [25.4]	1.355 [34.4]	0.790 [20.1]	0.630 [16.0]	0.260 [6.5]	0.237 [6.0]	0.040 [1.0]	0.435 [11.0]	1/4 [M6]	—	1.221 [31.0]	1.730 [44.0]	60295-1
32/40	1.375 [34.9]	1.800 [45.7]	1.065 [27.0]	0.600 [15.2]	0.400 [10.2]	0.394 [10.0]	0.156 [4.0]	0.510 [13.0]	1/4 [M6]	1.695 [43.0]	0.540 [13.7]	1.490 [38.0]	60296-1
50/63	1.890 [48.0]	2.365 [60.0]	1.460 [37.1]	0.755 [19.2]	0.508 [12.9]	0.472 [12.0]	0.236 [6.0]	0.709 [18.0]	5/16 [M8]	2.265 [57.5]	0.659 [16.7]	1.970 [50.0]	60297-1

Numbers in [] are in mm for metric units [CRx6].

NOTES:

- 1) 12-25 mm IS BRITE ZINC PLATED STEEL WITH LUBRICATED BRONZE BUSHINGS
- 2) 32-63 mm IS ANODIZED ALUMINUM WITH LUBRICATED BRONZE BUSHINGS
- 3) FULCRUM PIN INCLUDED. DOES NOT INCLUDE CYLINDER PIVOT.
- 4) *E IS TO CENTER OF PIVOT PIN
- 5) **G IS FROM CENTER OF PIVOT PIN TO CENTER OF FIRST MOUNTING HOLE.
- 6) DESIGNATED CENTERLINE ϕ IS CENTERLINE OF CYLINDER.


All dimensions are reference only unless specifically tolerated.

F MOUNT KIT

(Must be ordered separately)

Plated steel for use where front or rear mounting is not feasible. Brackets are narrow allowing units to be used where space to the side of the cylinder is limited.

NOTE: Brackets may be mounted in different configurations. Each kit includes 1 bracket and cylinder mounting hardware. Two kits recommended per unit.

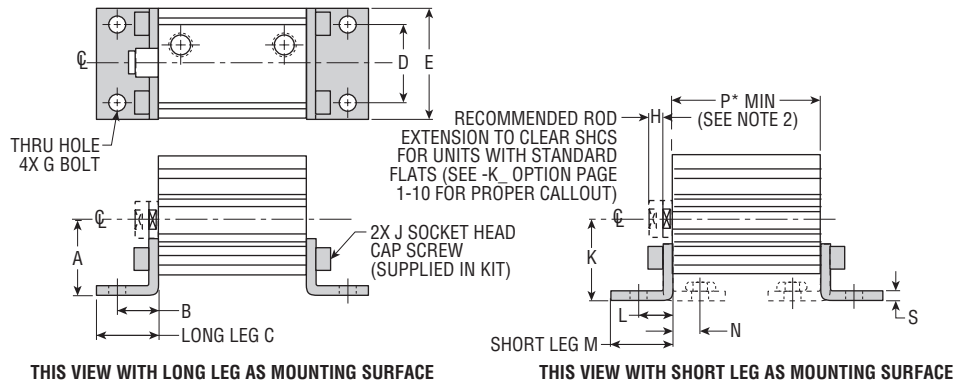

BORE [mm]	DIMENSIONS														KIT NO. IMPERIAL	KIT NO. METRIC
	A	B	C	D	E	G	H	J	K	L	M	N	P* MIN	S		
12	0.874 [22.2]	0.553 [14.0]	0.770 [19.6]	0.550 [14.0]	0.950 [24.13]	#10 [M5]	0.250 [5.0]	10-24 [M5 x 0.8]	0.986 [25.0]	0.441 [11.2]	0.660 [17.0]	0.336 [8.5]	3/8 [10.0]	0.105 [2.67]	58904-1	60302-1
16	0.945 [24.0]	0.589 [15.0]	0.850 [21.6]	0.710 [18.0]	1.110 [28.19]	#10 [M5]	0.250 [5.0]	10-24 [M5 x 0.8]	1.062 [27.0]	0.475 [12.1]	0.730 [18.5]	0.355 [9.0]	3/8 [10.0]	0.120 [3.05]	58905-1	60303-1
20	1.000 [25.4]	0.680 [17.3]	0.940 [23.9]	1.000 [25.4]	1.560 [39.62]	1/4 [M6]	0.375 [10.0]	1/4-20 [M6 x 1.0]	1.180 [30.0]	0.500 [12.7]	0.760 [19.3]	0.380 [9.7]	1/2 [15.0]	0.120 [3.05]	58906-1	60304-1
25	1.100 [27.9]	0.690 [17.5]	0.950 [24.1]	1.100 [27.9]	1.610 [40.90]	1/4 [M6]	0.375 [10.0]	1/4-20 [M6 x 1.0]	1.240 [31.5]	0.550 [14.0]	0.825 [21.0]	0.415 [10.5]	1/2 [15.0]	0.135 [3.43]	58907-1	60305-1
32	1.280 [32.5]	0.730 [18.5]	1.035 [26.3]	1.340 [34.0]	1.890 [48.00]	1/4 [M6]	0.375 [10.0]	1/4-20 [M6 x 1.0]	1.400 [35.5]	0.610 [15.5]	0.915 [23.2]	0.446 [11.3]	5/8 [20.0]	0.164 [4.17]	58908-1	60306-1
40	1.412 [35.9]	0.807 [20.5]	1.180 [30.00]	1.575 [40.0]	2.205 [56.00]	1/4 [M6]	0.375 [10.0]	1/4-20 [M6 x 1.0]	1.595 [40.5]	0.625 [15.9]	0.975 [24.8]	0.446 [11.3]	5/8 [20.0]	0.179 [4.55]	58909-1	60307-1
50	1.750 [44.5]	0.905 [23.0]	1.420 [36.1]	1.970 [50.0]	2.600 [66.00]	5/16 [M8]	0.500 [15.0]	5/16-18 [M8 x 1.25]	1.889 [48.0]	0.765 [19.4]	1.250 [31.8]	0.556 [14.1]	7/8 [25.0]	0.209 [5.31]	58910-1	60308-1
63	2.011 [51.1]	0.985 [25.0]	1.520 [38.6]	2.360 [60.0]	3.070 [78.00]	5/16 [M8]	0.500 [15.0]	5/16-18 [M8 x 1.25]	2.166 [55.0]	0.830 [21.0]	1.325 [33.7]	0.580 [14.7]	7/8 [25.0]	0.250 [6.35]	58911-1	60309-1

NOTES:

- NUMBERS IN [] ARE IN mm FOR METRIC UNITS [CRx6].
- *MINIMUM STROKE REQUIRED FOR LEGS OF BOTH BRACKETS TO BE UNDER UNIT (SUBTRACT 0.250 [5.0] FROM P FOR MAGNETIC UNITS)
- DESIGNATED CENTERLINE ϕ IS CENTERLINE OF CYLINDER.

J MOUNT KIT


(Must be ordered separately)

Plated steel for use where height is critical, but room is available to sides of unit.

NOTE: Brackets may be mounted in different configurations. Kit includes 2 brackets and cylinder mounting hardware.

NOTES:

- NUMBERS IN [] ARE IN mm FOR METRIC UNITS [CRx6].
- *MINIMUM STROKE REQUIRED FOR LEGS OF BOTH BRACKETS TO BE UNDER UNIT (SUBTRACT 0.250 [5.0] FROM P FOR MAGNETIC UNITS)
- DESIGNATED CENTERLINE ϕ IS CENTERLINE OF CYLINDER.

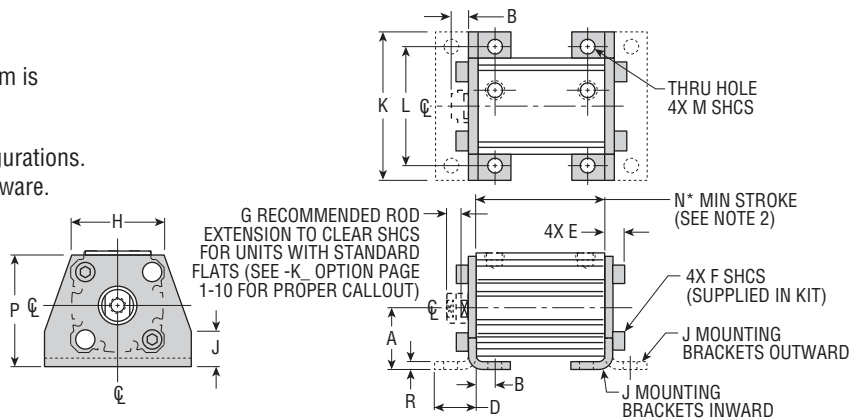


BORE [mm]	DIMENSIONS														KIT NO. IMPERIAL CRx3	KIT NO. METRIC CRx6
	A	B	D	E	F	G	H	J	K	L	M	N* MIN	P	R		
12	0.830 [21.1]	0.275 [7.0]	0.600 [15.3]	0.295 [7.5]	10-24 [M5 x 0.8]	0.250 [5.0]	0.945 [24.0]	0.390 [10.0]	1.810 [46.0]	1.380 [35.1]	#10 [M5]	0.250 [5.0]	1.510 [38.4]	0.105 [2.67]	60310-1	60318-1
16	0.870 [22.0]	0.275 [7.0]	0.610 [15.5]	0.310 [7.9]	10-24 [M5 x 0.8]	0.250 [5.0]	1.122 [28.5]	0.450 [11.5]	1.970 [50.0]	1.535 [39.0]	#10 [M5]	0.250 [5.0]	1.620 [41.2]	0.120 [3.05]	60311-1	60319-1
20	0.945 [24.0]	0.315 [8.0]	0.710 [18.0]	0.370 [9.4]	1/4-20 [M6 x 1.0]	0.375 [10.0]	1.470 [37.4]	0.450 [11.5]	2.520 [64.0]	1.969 [50.0]	1/4 [M6]	0.375 [10.0]	1.750 [44.5]	0.120 [3.05]	60312-1	60320-1
25	1.005 [25.5]	0.315 [8.0]	0.725 [18.5]	0.390 [9.9]	1/4-20 [M6 x 1.0]	0.375 [10.0]	1.581 [40.2]	0.490 [12.5]	2.600 [66.0]	2.047 [52.0]	1/4 [M6]	0.375 [10.0]	1.890 [48.0]	0.135 [3.43]	60313-1	60321-1
32	1.218 [31.0]	0.355 [9.0]	0.834 [21.2]	0.414 [10.5]	1/4-20 [M6 x 1.0]	0.375 [10.0]	1.873 [47.6]	0.630 [16.0]	2.950 [75.0]	2.362 [60.0]	1/4 [M6]	0.375 [10.0]	2.240 [57.0]	0.164 [4.17]	60314-1	60322-1
40	1.400 [35.6]	0.355 [9.0]	0.885 [22.5]	0.429 [10.9]	1/4-20 [M6 x 1.0]	0.375 [10.0]	2.190 [55.7]	0.670 [17.0]	3.310 [84.1]	2.677 [68.0]	1/4 [M6]	0.500 [12.7]	2.560 [65.0]	0.179 [4.55]	60315-1	60323-1
50	1.730 [44.0]	0.492 [12.5]	1.110 [28.2]	0.531 [13.5]	5/16-18 [M8 x 1.25]	0.500 [15.0]	2.577 [65.5]	0.850 [21.5]	3.940 [100.1]	3.189 [81.0]	5/16 [M8]	0.625 [15.9]	3.150 [80.0]	0.209 [5.31]	60316-1	60324-1
63	2.010 [51.1]	0.512 [13.0]	1.250 [31.8]	0.570 [14.5]	5/16-18 [M8 x 1.25]	0.500 [15.0]	3.055 [77.6]	1.000 [25.5]	4.530 [115.1]	3.661 [93.0]	5/16 [M8]	0.750 [19.0]	3.660 [93.0]	0.250 [6.35]	60317-1	60325-1

All dimensions are reference only unless specifically toleranced.

ROD EYE KIT

BORE [mm]	DIMENSIONS						KIT: CRx3x IMPERIAL	KIT: CRx6x METRIC
	A	B	C	D	F	G		
12/16	0.438 [11.0]	0.250 [6.5]	0.885 [22.5]	0.215 [5.5]	8-32 [M4 x 0.7]	0.197 [5.0]	59069-1	60234-1
20/25	0.500 [12.7]	0.375 [9.5]	1.065 [27.0]	0.255 [6.5]	1/4-28 [M6 x 1.0]	0.236 [6.0]	59070-1	60235-1
32/40	0.625 [16.0]	0.500 [12.5]	1.495 [38.0]	0.355 [9.0]	5/16-24 [M8 x 1.25]	0.394 [10.0]	59071-1	60236-1
50/63	0.875 [22.2]	0.625 [16.0]	1.610 [41.0]	0.430 [11.0]	3/8-24 [M10 x 1.5]	0.472 [12.0]	59072-1	60237-1

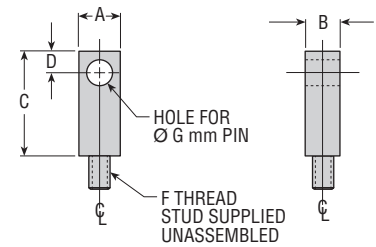


NOTES:

- UNIT MUST BE ORDERED WITH STANDARD FEMALE THREADS
- DESIGNATED CENTERLINE $\mathcal{C}$ IS CENTERLINE OF PART. ALL FEATURES CENTERED ON $\mathcal{C}$ UNLESS OTHERWISE NOTED.
- STANDARD PLATING IS BRITZ ZINC
- NUMBERS IN [] ARE IN mm FOR METRIC UNITS [CRx6]

ROD CLEVIS KIT

BORE [mm]	DIMENSIONS									KIT: CRx3x IMPERIAL	KIT: CRx6x METRIC
	A	B	C	D	F	G	H	J	K		
12/16	0.438 [11.0]	0.625 [15.9]	1.000 [25.4]	0.215 [5.5]	0.266 [6.8]	0.610 [15.5]	0.197 [5.0]	8-32 [M4 x 0.7]	0.845 [21.5]	59073-1	60238-1
20/25	0.500 [12.7]	0.750 [19.0]	1.255 [32.0]	0.255 [6.5]	0.391 [9.9]	0.738 [18.8]	0.236 [6.0]	1/4-28 [M6 x 1.0]	0.965 [24.5]	59074-1	60239-1
32/40	0.625 [15.9]	1.000 [25.4]	1.615 [41.0]	0.315 [8.0]	0.518 [13.2]	0.925 [23.5]	0.394 [10.0]	5/16-24 [M8 x 1.25]	1.300 [33.0]	59075-1	60240-1
50/63	0.875 [22.2]	1.250 [31.8]	1.815 [46.1]	0.435 [11.0]	0.645 [16.4]	1.165 [29.6]	0.472 [12.0]	3/8-24 [M10 x 1.5]	1.575 [40.0]	59076-1	60241-1

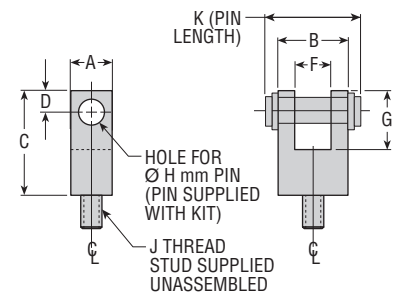


NOTES:

- UNIT MUST BE ORDERED WITH STANDARD FEMALE THREADS
- DESIGNATED CENTERLINE $\mathcal{C}$ IS CENTERLINE OF PART. ALL FEATURES CENTERED ON $\mathcal{C}$ UNLESS OTHERWISE NOTED.
- STANDARD PLATING IS BRITZ ZINC (PIN & CLEVIS)
- NUMBERS IN [] ARE IN mm FOR METRIC UNITS [CRx6]

ROD FULCRUM PIN KIT

Replacement for Rod Clevis pin or for use with PHD Rod Eye. Pin is Brite Zinc plated. Retaining rings are supplied.

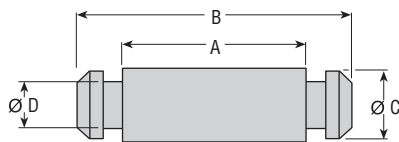


BORE [mm]	DIMENSIONS				KIT: CRx3x, CRx6x IMPERIAL/METRIC
	A	B	Ø C	Ø D	
12/16	0.665 [16.9]	0.845 [21.5]	0.197 [5.0]	0.125 [3.2]	60326-1
20/25	0.785 [19.9]	0.965 [24.5]	0.236 [6.0]	0.156 [4.0]	60327-1
32/40	1.045 [26.5]	1.300 [33.0]	0.394 [10.0]	0.274 [7.0]	60328-1
50/63	1.295 [32.9]	1.575 [40.0]	0.472 [12.0]	0.353 [9.0]	60329-1

NOTE: Numbers in [] are in mm for metric units [CRx6].

CYLINDER FULCRUM PIN KIT

Replacement for base pivot pin or for use with PHD Cylinder Pivot. Pin is Brite Zinc plated. Retaining rings are supplied.

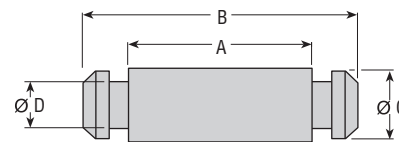

BORE [mm]	DIMENSIONS				KIT: CRx3x, CRx6x IMPERIAL/METRIC
	A	B	Ø C	Ø D	
12/16	1.120 [28.5]	1.300 [33.0]	0.197 [5.0]	0.125 [3.1]	60330-1
20/25	1.550 [39.4]	1.730 [44.0]	0.236 [6.0]	0.156 [4.0]	60331-1
32/40	1.240 [31.5]	1.490 [37.9]	0.394 [10.0]	0.274 [7.0]	60332-1
50/63	1.690 [42.9]	1.970 [50.0]	0.472 [12.0]	0.353 [9.0]	60333-1

NOTE: Numbers in [] are in mm for metric units [CRx6].

All dimensions are reference only unless specifically toleranced.