


Main features

16 ÷ 100

Bores Ø



Double acting
Magnetic
3 Fingers

PPE

Type



Technical data


Bore Ø mm		16	20	25	32	40	50	63	80	100
Fluid		Compressed filtered air.								
Lubrication		Not required								
Pressure range		3 ÷ 7 bar								
Temperature range		0°C ÷ +60°C								
Lever open/close stroke		4 mm		6 mm	8 mm		12 mm	16 mm	20 mm	24 mm
Maximum operation frequency		120/min.			60/min.				30/min.	
Ports	Side	M3		M5					1/8"	1/4"
	End cover	-			M5					1/8"
Effective gripping force (N)	Open	21,0	37,0	63,0	111,0	177,0	280,0	502,0	710,0	1.068,0
	Close	23,0	42,0	71,0	123,0	195,0	306,0	537,0	748,0	1.111,0
Weight (g)		60	98	146	295	378	561	1.032	1.768	3.224

Codes


Function	PPE Bore Ø mm								
	16	20	25	32	40	50	63	80	100
Double acting	170673	170674	075053	075054	075055	075056	075057	170675	170676

Standard dimensions

Type: **PPE**
Ø 16

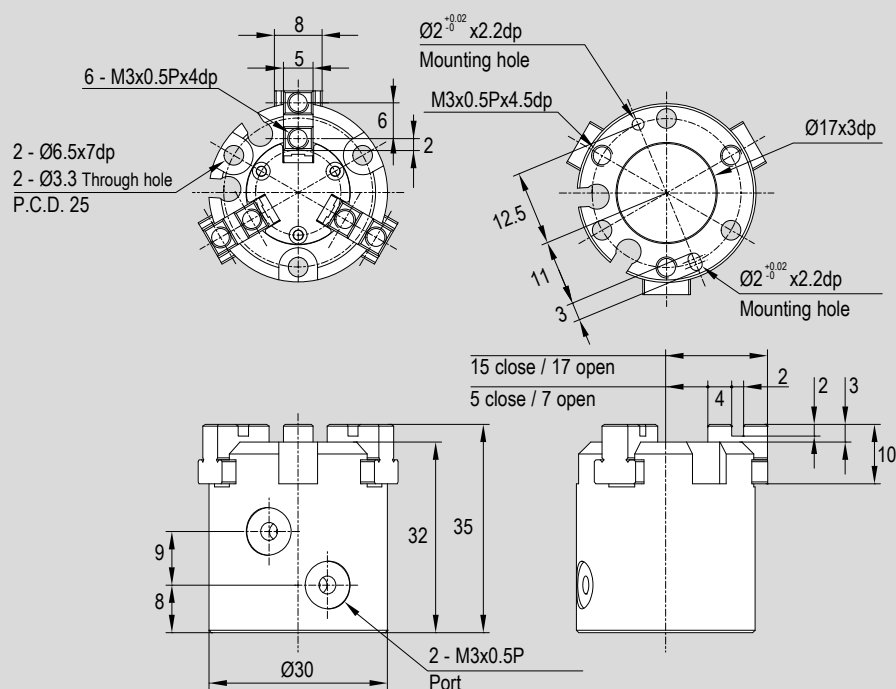


Type: **PPE**
Ø 20

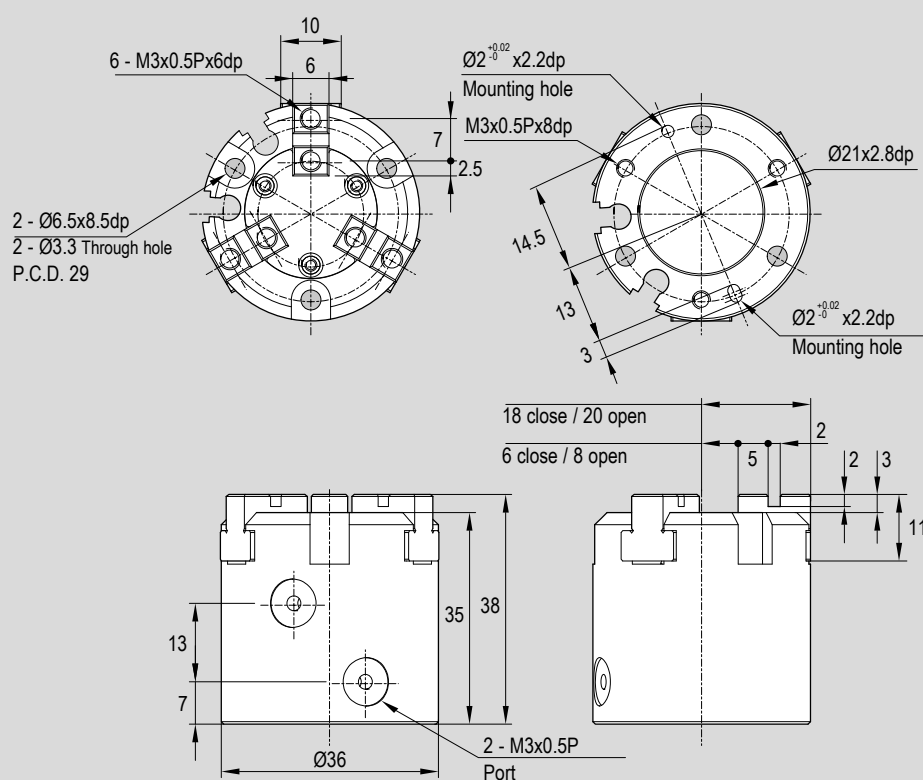


Standard dimensions

Type: **PPE**
Ø 25

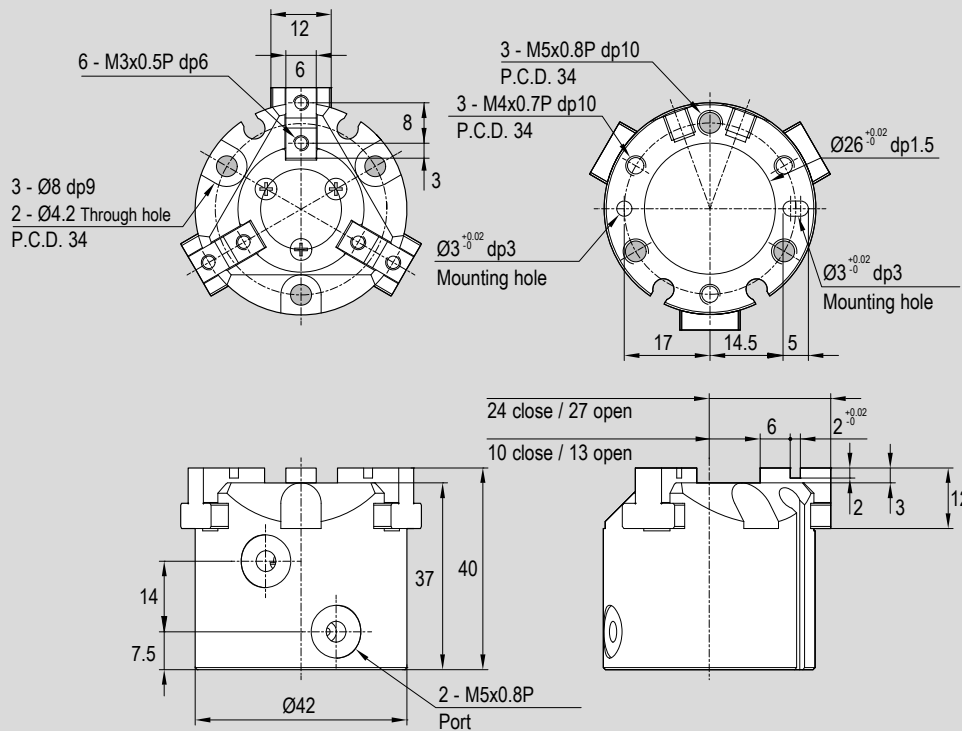


Type: **PPE**
Ø 32

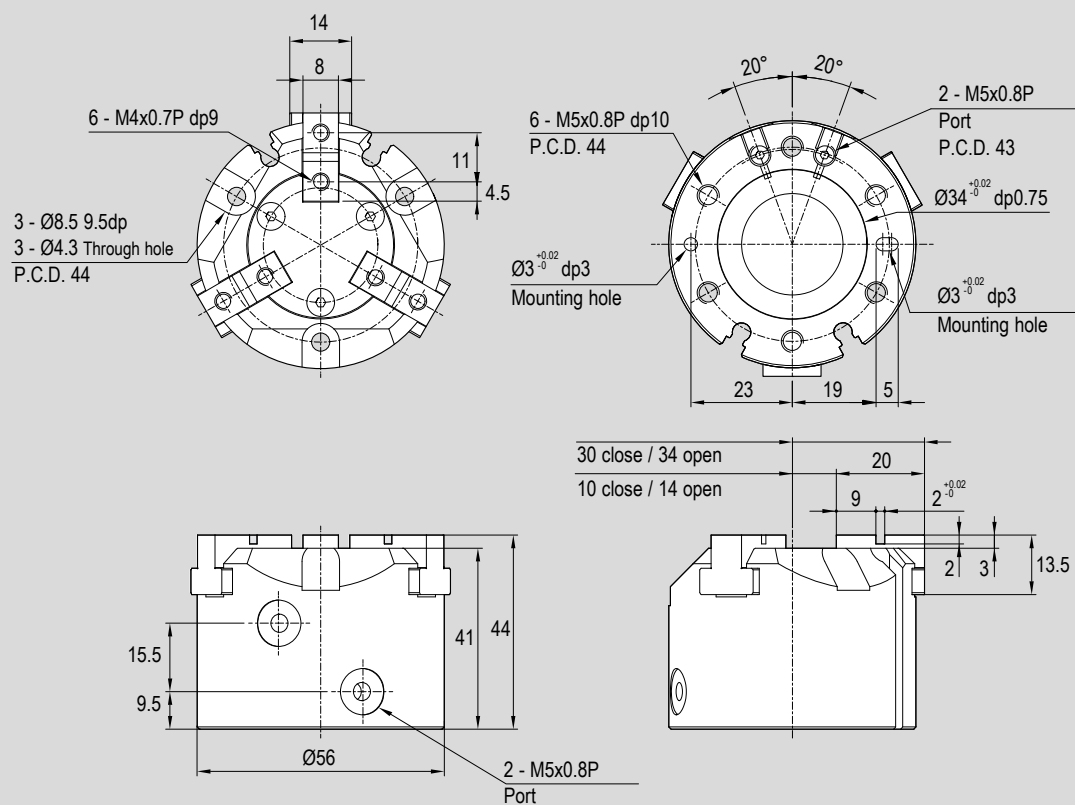


Standard dimensions

Type: **PPE**
Ø 40

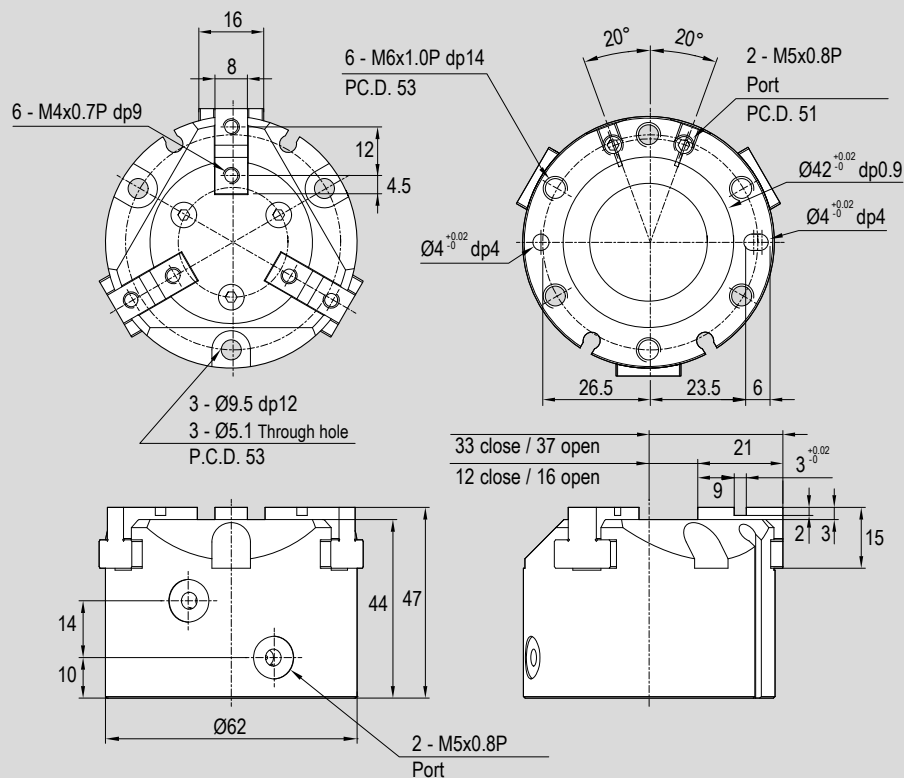


Type: **PPE**
Ø 50

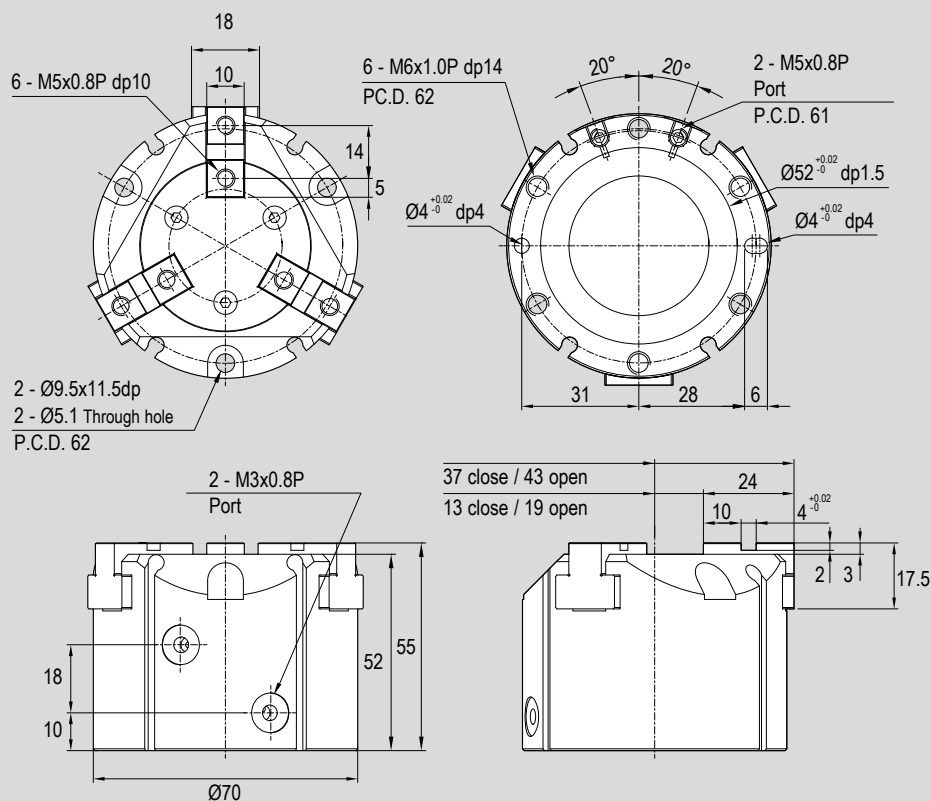


Standard dimensions

Type: **PPE**
Ø 63

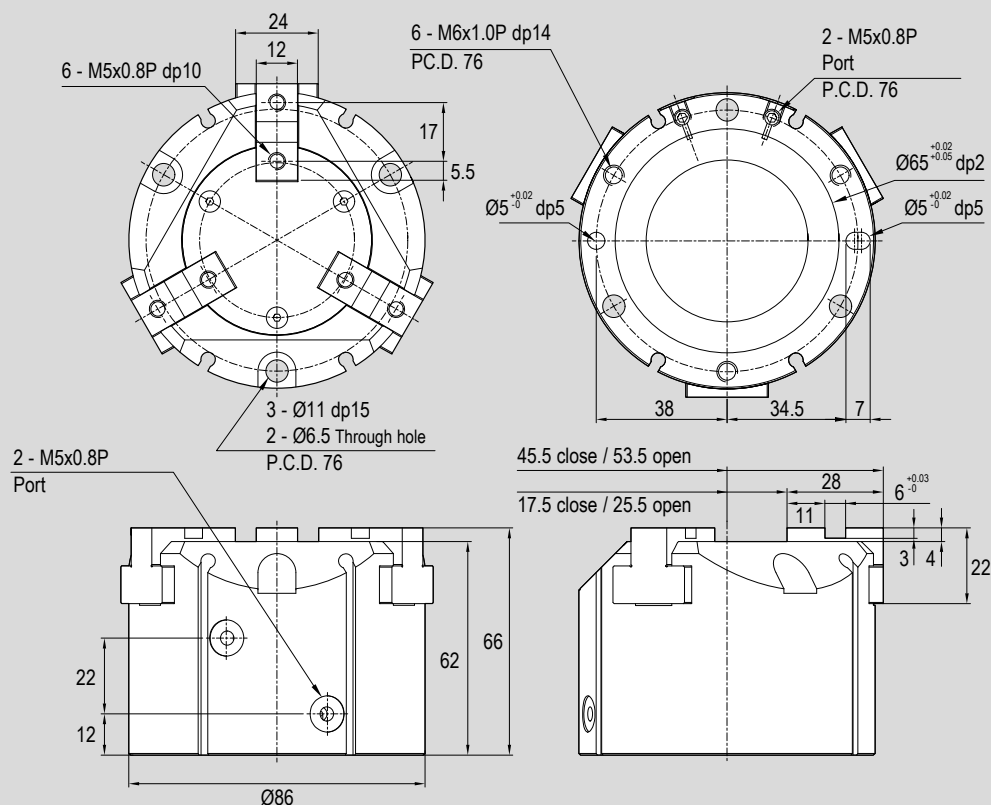

Type: **PPE**
Ø 80

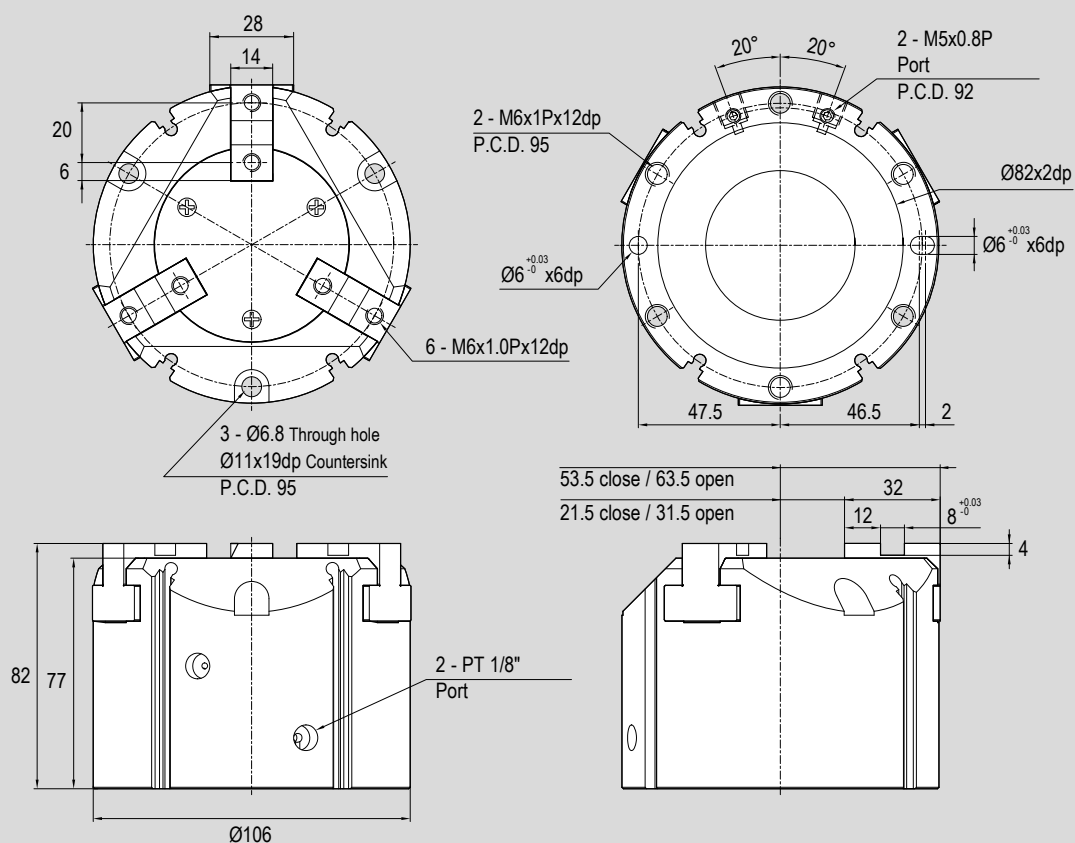

Standard dimensions

