

Main features and certifications

Standard fittings in nickel-plated brass. Available in many versions and threads. Supplied as standard in compliance to Reach and RoHS directives.



Series A

from page 4.35.10



Series of standard fittings available in many configurations, to adapt the connections of every installation. Available with taper BSPT threads and BSP threads, in various sizes.

Standard fittings

Series A



Code key

Series	Type*	Thread 1*	Thread 2*
A	002	12	14

A

001, 002, 003, 004, 005, 006, 007, 008, 009, 010, 011, 012, 013, 014, 015, 016, 021, 022, 023, 024, 025, 026, 027, 035, 036, 039, 040, 041, 042, 044, 045, 046, 047

M5 = M5x0,8
18 = 1/8"
14 = 1/4"
38 = 3/8"
12 = 1/2"
34 = 3/4"
01 = 1"

Notes

For standard materials see the table below.

For special versions (**/S**), contact the sales department.

* For matching between fitting types and thread, see from page 4.35.12; for the specific type, see the following pages.

How to order


Series	Type	Thread 1	Thread 2
A	002	12	14

Technical data

Version	Series A
Fluid	Compressed air
Maximum pressure	60 bar
Temperature range*	-40°C ÷ +150°C
Parallel threads	UNI - ISO 228 / 1 (BSP)
Taper threads	UNI EN 10226-1 (BSPT)
Metric threads	UNI EN ISO 965-1

* For fittings with NBR seal is -20°C ÷ +80°C

Standard materials

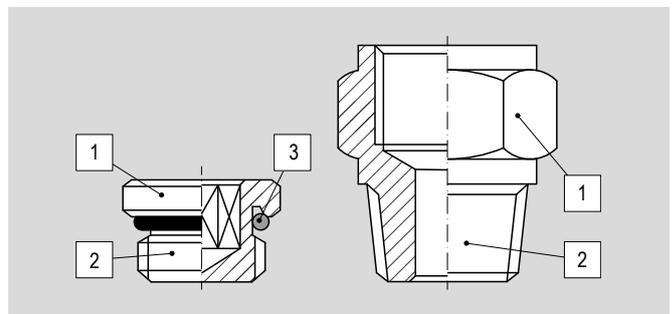

Position	Description	Material
1	Body	Nickel-plated brass
2	Thread	Nickel-plated brass
3	Seal*	NBR

*Where present

Fittings series A

Type			Taper threads (BSPT)	Parallel threads (BSP)	Metric threads	Stem Ø mm	Data sheet and code page
A001	M/F BSP reducer		-	1/8", 1/4", 3/8", 1/2", 3/4", 1"	M5x0,8	-	4.35.13
A002	M/F BSPT reducer		1/8", 1/4", 3/8", 1/2", 3/4", 1"	-	-	-	4.35.13
A003	M/F BSP increaser		-	1/8", 1/4", 3/8", 1/2", 3/4", 1"	M5x0,8	-	4.35.14
A004	M/F BSPT increaser		1/8", 1/4", 3/8", 1/2", 3/4", 1"	-	-	-	4.35.14
A039	M/F BSP extension		-	1/8", 1/4", 3/8", 1/2", 3/4", 1"	-	-	4.35.15
A007	Female socket		-	1/8", 1/4", 3/8", 1/2", 3/4", 1"	M5x0,8	-	4.35.15
A005	BSP nipple		-	1/8", 1/4", 3/8", 1/2", 3/4", 1"	M5x0,8	-	4.35.16
A006	BSPT nipple		1/8", 1/4", 3/8", 1/2", 3/4", 1"	-	-	-	4.35.16
A047	BSPT nipple union		1/8", 1/4", 3/8", 1/2", 3/4", 1"	-	-	-	4.35.17
A015	BSP hose adapter		-	1/8", 1/4", 3/8", 1/2"	-	7, 8, 9, 12, 17	4.35.17
A044	Female bulkhead		-	1/8", 1/4", 3/8", 1/2"	M5x0,8	-	4.35.18
A013	Nut		-	1/8", 1/4", 3/8", 1/2", 3/4", 1"	-	-	4.35.18
A008	Male BSP plug		-	1/8", 1/4", 3/8", 1/2", 3/4", 1"	M5x0,8	-	4.35.19
A016	Male BSPT plug		1/8", 1/4", 3/8", 1/2", 3/4", 1"	-	-	-	4.35.19
A009	Male BSP plug with O-ring		-	1/8", 1/4", 3/8", 1/2"	M5x0,8	-	4.35.20
A010	Female plug		-	1/8", 1/4", 3/8", 1/2", 3/4", 1"	M5x0,8	-	4.35.20
A011	BSP olive		-	1/8", 1/4", 3/8", 1/2"	-	-	4.35.21
A012	BSPT olive		1/8", 1/4", 3/8", 1/2"	-	-	-	4.35.21
A014	M/F BSP reducing insert		-	1/8", 1/4", 3/8", 1/2", 3/4", 1"	M5x0,8	-	4.35.22
A021	F/F elbow		-	1/8", 1/4", 3/8", 1/2", 3/4", 1"	M5x0,8	-	4.35.22
A022	M/F elbow		1/8", 1/4", 3/8", 1/2", 3/4", 1"	1/8", 1/4", 3/8", 1/2", 3/4", 1"	M5x0,8	-	4.35.23
A035	M/M elbow		1/8", 1/4", 3/8", 1/2", 3/4", 1"	-	M5x0,8	-	4.35.23
A023	F/F/F tee		-	1/8", 1/4", 3/8", 1/2", 3/4", 1"	M5x0,8	-	4.35.24

Fittings series A

Type			Taper threads (BSPT)	Parallel threads (BSP)	Metric threads	Stem Ø mm	Data sheet and code page
A024	F/M/F tee		1/8", 1/4", 3/8", 1/2", 3/4", 1"	1/8", 1/4", 3/8", 1/2", 3/4", 1"	M5x0,8	-	4.35.24
A025	M/F/F tee		1/8", 1/4", 3/8", 1/2", 3/4", 1"	1/8", 1/4", 3/8", 1/2", 3/4", 1"	M5x0,8	-	4.35.25
A027	M/M/F tee		1/8", 1/4", 3/8", 1/2", 3/4"	1/8", 1/4", 3/8", 1/2", 3/4"	-	-	4.35.25
A036	M/M/M tee		1/8", 1/4", 3/8", 1/2", 3/4", 1"	-	-	-	4.35.26
A045	M/F/M tee		1/8", 1/4", 3/8", 1/2", 3/4", 1"	1/8", 1/4", 3/8", 1/2", 3/4", 1"	-	-	4.35.26
A040	F/F/F Y		-	1/8", 1/4", 3/8", 1/2"	-	-	4.35.27
A041	F/M/F Y		1/8", 1/4", 3/8", 1/2"	1/8", 1/4", 3/8", 1/2"	-	-	4.35.27
A026	F/F/F/F +		-	1/8", 1/4", 3/8", 1/2"	-	-	4.35.28
A046	F/M/F/F +		1/8", 1/4", 3/8", 1/2"	1/8", 1/4", 3/8", 1/2"	-	-	4.35.28
A042	Female single banjo		-	1/8", 1/4", 3/8", 1/2"	M5x0,8	-	4.35.29


Standard fittings

Series A



Main features

Type	Description
A001	M/F BSP reducer. In nickel-plated brass. For sealing washers see page 4.65.1

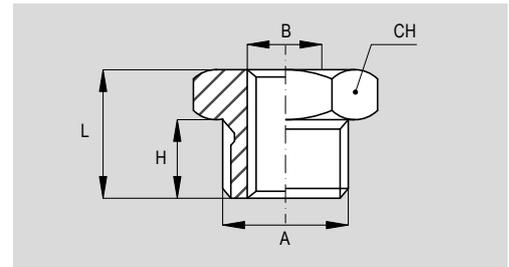


Dimensions

Code	Item	A	B	H	L	CH	Weight (g)
022301	A001 18 05	G1/8"	M5x0,8	6	10	14	-
022302	A001 14 18	G1/4"	G1/8"	8	13	17	-
022303	A001 38 18	G3/8"	G1/8"	9	14	19	-
022304	A001 38 14	G3/8"	G1/4"	9	14	19	-
022313	A001 12 18	G1/2"	G1/8"	9	15	24	-
022305	A001 12 14	G1/2"	G1/4"	9	15	24	-
022306	A001 12 38	G1/2"	G3/8"	9	15	24	-
022307	A001 34 14	G3/4"	G1/4"	11	16	30	-
022308	A001 34 38	G3/4"	G3/8"	11	16	30	-
022309	A001 34 12	G3/4"	G1/2"	11	16	30	-
022310	A001 01 38	G1"	G3/8"	12	19	36	-
022311	A001 01 12	G1"	G1/2"	12	19	36	-
022312	A001 01 34	G1"	G3/4"	12	19	36	-

Main features

Type	Description
A002	M/F BSPT reducer. In nickel-plated brass.

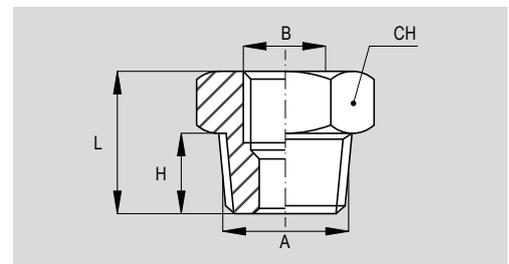

Dimensions

Code	Item	A	B	H	L	CH	Weight (g)
022331	A002 14 18	R1/4"	G1/8"	10	15	14	-
022332	A002 38 18	R3/8"	G1/8"	10	15	17	-
022333	A002 38 14	R3/8"	G1/4"	10	15	17	-
022342	A002 12 18	R1/2"	G1/8"	13	19	22	-
022334	A002 12 14	R1/2"	G1/4"	13	19	22	-
022335	A002 12 38	R1/2"	G3/8"	13	19	22	-
022336	A002 34 14	R3/4"	G1/4"	14	20,5	27	-
022337	A002 34 38	R3/4"	G3/8"	14	20,5	27	-
022338	A002 34 12	R3/4"	G1/2"	14	20,5	27	-
022339	A002 01 38	R1"	G3/8"	16	22	34	-
022340	A002 01 12	R1"	G1/2"	16	22	34	-
022341	A002 01 34	R1"	G3/4"	16	22	34	-

4 - ACCESSORIES


Standard fittings

Series A



Main features

Type	Description
A003	M/F BSP increaser. In nickel-plated brass. For sealing washers see page 4.65.1

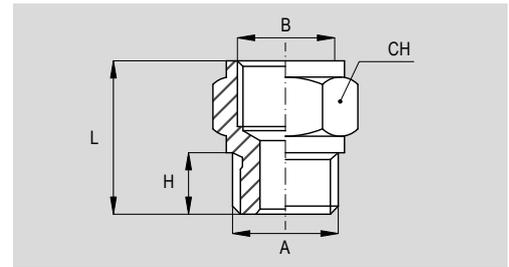


Dimensions

Code	Item	A	B	H	L	CH	Weight (g)
022361	A003 05 05	M5x0,8	M5x0,8	4	11	8	-
022362	A003 05 18	M5x0,8	G1/8"	5	16	14	-
022363	A003 18 18	G1/8"	G1/8"	6	16	14	-
022364	A003 18 14	G1/8"	G1/4"	6	19,5	17	-
022365	A003 18 38	G1/8"	G3/8"	6	20	22	-
022366	A003 14 14	G1/4"	G1/4"	8	21	17	-
022367	A003 14 38	G1/4"	G3/8"	8	21	22	-
022368	A003 14 12	G1/4"	G1/2"	8	25	27	-
022369	A003 38 38	G3/8"	G3/8"	9	23	22	-
022370	A003 38 12	G3/8"	G1/2"	9	26	27	-
022371	A003 12 12	G1/2"	G1/2"	10	26	27	-
022372	A003 38 34	G3/8"	G3/4"	9	26	32	-
022373	A003 12 34	G1/2"	G3/4"	10	27	32	-
022374	A003 34 34	G3/4"	G3/4"	11	28	32	-
022375	A003 12 01	G1/2"	G1"	10	29	38	-
022376	A003 34 01	G3/4"	G1"	11	30	38	-
022377	A003 01 01	G1"	G1"	12	31	38	-

Main features

Type	Description
A004	M/F BSPT increaser. In nickel-plated brass.

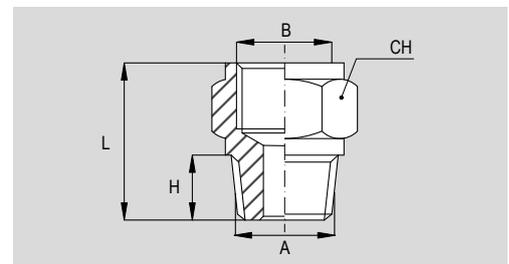

Dimensions

Code	Item	A	B	H	L	CH	Weight (g)
022391	A004 18 18	R1/8"	G1/8"	7,5	17,5	14	-
022392	A004 18 14	R1/8"	G1/4"	7,5	21	17	-
022393	A004 18 38	R1/8"	G3/8"	7,5	22	22	-
022394	A004 14 14	R1/4"	G1/4"	10	24	17	-
022395	A004 14 38	R1/4"	G3/8"	10	26	22	-
022396	A004 14 12	R1/4"	G1/2"	10	28	27	-
022397	A004 38 38	R3/8"	G3/8"	10	26	22	-
022398	A004 38 12	R3/8"	G1/2"	10	28	27	-
022399	A004 12 12	R1/2"	G1/2"	12	30	27	-
022400	A004 38 34	R3/8"	G3/4"	10	27	32	-
022401	A004 12 34	R1/2"	G3/4"	13	30	32	-
022402	A004 34 34	R3/4"	G3/4"	14	31	32	-
022403	A004 12 01	R1/2"	G1"	13	32	38	-
022404	A004 34 01	R3/4"	G1"	14	33	38	-
022405	A004 01 01	R1"	G1"	16	35	38	-


Standard fittings

Series A



Main features

Type	Description
A039	M/F BSP extension In nickel-plated brass. For sealing washers see page 4.65.1

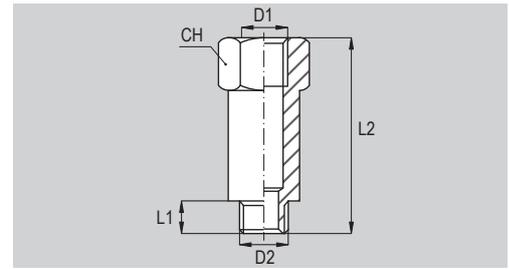


Dimensions

Code	Item	D1	D2	L1	L2	CH	Weight (g)
022821	A039 18 C23	G1/8"	G1/8"	6	23	12	-
022822	A039 18 L44	G1/8"	G1/8"	6	44	12	-
022823	A039 14 C28	G1/4"	G1/4"	8	28	16	-
022824	A039 14 L45	G1/4"	G1/4"	8	45	16	-
022825	A039 12 C36	G1/2"	G1/2"	9	36	24	-
022826	A039 14 L51	G1/4"	G1/4"	8	51	16	-
022827	A039 38 L41	G3/8"	G3/8"	9	41	22	-
022829	A039 34 L50	G3/4"	G3/4"	-	50	30	-
022830	A039 01 L50	G1"	G1"	-	50	38	-

Main features

Type	Description
A007	Female socket. In nickel-plated brass.

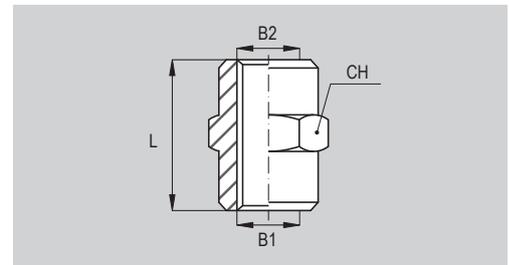

Dimensions

Code	Item	B1	B2	L	CH	Weight (g)
022481	A007 05 05	M5x0,8	M5x0,8	11	8	-
022482	A007 05 18	M5x0,8	G1/8"	12,5	14	-
022483	A007 18 18	G1/8"	G1/8"	15	14	-
022484	A007 18 14	G1/8"	G1/4"	18,5	17	-
022485	A007 18 38	G1/8"	G3/8"	20	22	-
022486	A007 14 14	G1/4"	G1/4"	22	17	-
022487	A007 14 38	G1/4"	G3/8"	21	22	-
022488	A007 14 12	G1/4"	G1/2"	24	27	-
022489	A007 38 38	G3/8"	G3/8"	23	22	-
022490	A007 38 12	G3/8"	G1/2"	24	27	-
022491	A007 12 12	G1/2"	G1/2"	28,5	27	-
022492	A007 12 34	G1/2"	G3/4"	25	32	-
022493	A007 34 34	G3/4"	G3/4"	29	32	-
022494	A007 34 01	G3/4"	G1"	25	38	-
022495	A007 01 01	G1"	G1"	31	38	-

4 - ACCESSORIES


Standard fittings

Series A



Main features

Type	Description
A005	BSP nipple. In nickel-plated brass. For sealing washers see page 4.65.1

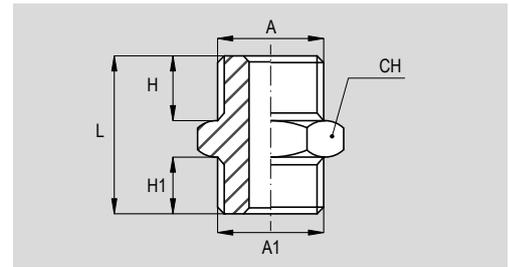


Dimensions

Code	Item	A	A1	H	H1	L	CH	Weight (g)
022421	A005 05 05	M5x0,8	M5x0,8	4	4	11	8	-
022422	A005 05 18	M5x0,8	G1/8"	4	6	14	14	-
022423	A005 18 18	G1/8"	G1/8"	6	6	16,5	14	-
022424	A005 18 14	G1/8"	G1/4"	6	8	19	17	-
022425	A005 18 38	G1/8"	G3/8"	6,5	9	20	19	-
022426	A005 14 14	G1/4"	G1/4"	8	8	21	17	-
022427	A005 14 38	G1/4"	G3/8"	8	9	22	19	-
022428	A005 14 12	G1/4"	G1/2"	8	10	23,5	24	-
022429	A005 38 38	G3/8"	G3/8"	9	9	23	19	-
022430	A005 38 12	G3/8"	G1/2"	9	10	24,5	24	-
022431	A005 12 12	G1/2"	G1/2"	10	10	25,5	24	-
022432	A005 12 34	G1/2"	G3/4"	10	11	27	30	-
022433	A005 34 34	G3/4"	G3/4"	11	11	28	30	-
022434	A005 34 01	G3/4"	G1"	11	13	30	36	-
022435	A005 01 01	G1"	G1"	12	12	31	36	-

Main features

Type	Description
A006	BSPT nipple. In nickel-plated brass.

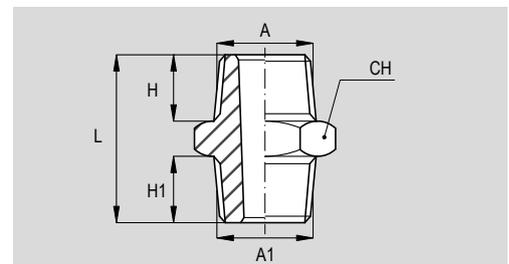

Dimensions

Code	Item	A	A1	H	H1	L	CH	Weight (g)
022451	A006 18 18	R1/8"	R1/8"	7,5	7,5	19	12	-
022452	A006 18 14	R1/8"	R1/4"	7,5	10	22,5	14	-
022453	A006 18 38	R1/8"	R3/8"	7,5	10	22,5	17	-
022454	A006 14 14	R1/4"	R1/4"	10	10	25	14	-
022455	A006 14 38	R1/4"	R3/8"	10	10	25	17	-
022456	A006 14 12	R1/4"	R1/2"	11,2	13,5	30	22	-
022457	A006 38 38	R3/8"	R3/8"	10	10	25	17	-
022458	A006 38 12	R3/8"	R1/2"	10	12	28	22	-
022459	A006 12 12	R1/2"	R1/2"	12	12	30	22	-
022460	A006 12 34	R1/2"	R3/4"	12	14	32	27	-
022461	A006 34 34	R3/4"	R3/4"	14	14	34	27	-
022462	A006 34 01	R3/4"	R1"	14	16	36	34	-
022463	A006 01 01	R1"	R1"	16	16	39	34	-


Standard fittings

Series A



Main features

Type	Description
A047	BSPT nipple union. In nickel-plated brass.

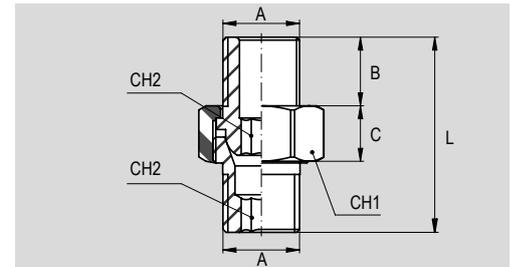


Dimensions

Code	Item	A	B	C	L	CH1	CH2	Weight (g)
023471	A047 18 18	R1/8"	9	8,5	27	15	5	-
023472	A047 14 14	R1/4"	12	9,5	33,5	19	6	-
023473	A047 38 38	R3/8"	13	10,2	36,5	22	8	-
023474	A047 12 12	R1/2"	16	12	44	27	12	-
023475	A047 34 34	R3/4"	18	17	53	36	14	-
023476	A047 01 01	R1"	22	20	64	46	19	-

Main features

Type	Description
A015	BSP hose adapter. In nickel-plated brass. For sealing washers see page 4.65.1

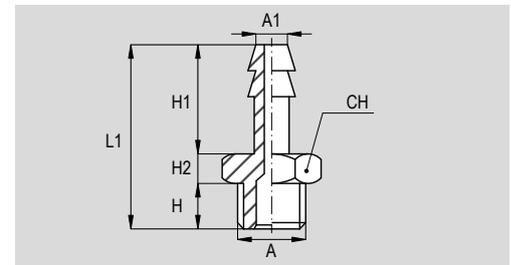

Dimensions

Code	Item	A	A1	H	H1	H2	L1	CH	Weight (g)
022601	A015 18 07	G1/8"	7	6	18	4	28	12	-
022602	A015 18 08	G1/8"	8	6	18	4	28	12	-
022603	A015 18 09	G1/8"	9	6	18	4	28	12	-
022604	A015 14 07	G1/4"	7	8	18	4,5	30,5	17	-
022605	A015 14 08	G1/4"	8	8	18	4,5	30,5	17	-
022606	A015 14 09	G1/4"	9	8	18	4,5	30,5	17	-
022607	A015 14 12	G1/4"	12	8	18	4,5	30,5	17	-
022608	A015 38 09	G3/8"	9	9	18	5	32	19	-
022609	A015 38 12	G3/8"	12	9	18	5	32	19	-
022610	A015 38 17	G3/8"	17	9	18	5	32	19	-
022611	A015 12 12	G1/2"	12	10	18	6	34	24	-
022612	A015 12 17	G1/2"	17	9	24	5	38	24	-

4 - ACCESSORIES


Standard fittings

Series A



Main features

Type	Description
A044	Female bulkhead. In nickel-plated brass.

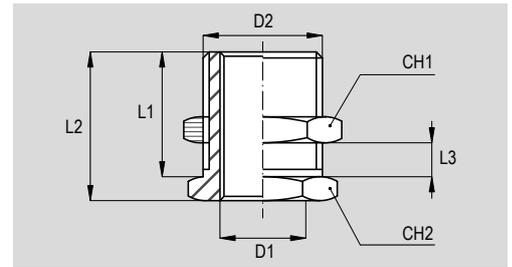


Dimensions

Code	Item	D1	D2	L1	L2	L3 (max)	CH1	CH2	Weight (g)
022881	A044 05 05	M5x0,8	M10x1	9,5	13	6	14	14	-
022882	A044 18 18	G1/8"	M16x1,5	15	19	10	22	19	-
022883	A044 14 14	G1/4"	M20x1,5	19	23	14	27	24	-
022884	A044 38 38	G3/8"	M26x1,5	22	27	16	32	30	-
022885	A044 12 12	G1/2"	M28x1,5	28	34	21	36	32	-

Main features

Type	Description
A013	Nut. In nickel-plated brass.

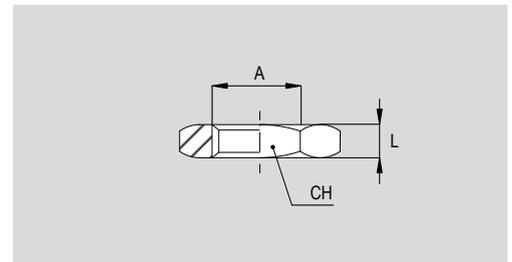

Dimensions

Code	Item	A	CH	L	Weight (g)
022551	A013 18 18	G1/8"	12	3	-
022552	A013 14 14	G1/4"	16	3	-
022553	A013 38 38	G3/8"	19	4	-
022554	A013 12 12	G1/2"	24	4	-
022555	A013 34 34	G3/4"	30	5	-
022556	A013 01 01	G1"	38	6	-


Standard fittings

Series A



Main features

Type	Description
A008	Male BSP plug. In nickel-plated brass. For sealing washers see page 4.65.1

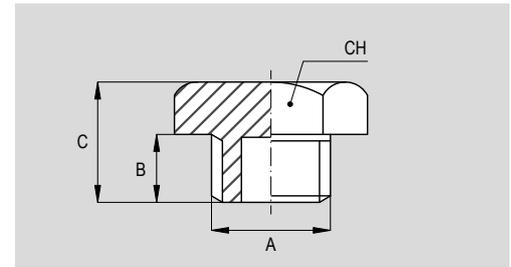


Dimensions

Code	Item	A	B	C	CH	Weight (g)
022517	A008 05 05	M5x0,8	4,5	7,5	8	-
022511	A008 18 18	G1/8"	6	10	14	-
022512	A008 14 14	G1/4"	8	12,5	17	-
022513	A008 38 38	G3/8"	9	14	19	-
022514	A008 12 12	G1/2"	10	15	24	-
022515	A008 34 34	G3/4"	11	16,5	30	-
022516	A008 01 01	G1"	13	19	36	-

Main features

Type	Description
A016	Male BSPT plug. In nickel-plated brass.

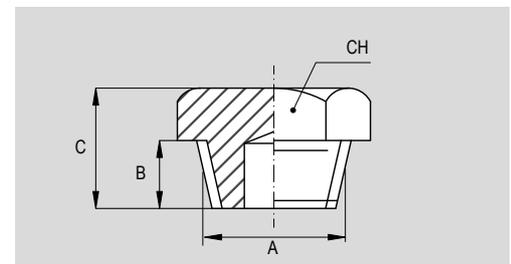

Dimensions

Code	Item	A	B	C	CH	Weight (g)
022471	A016 18 18	R1/8"	7,5	11,5	14	-
022472	A016 14 14	R1/4"	11	15,5	17	-
022473	A016 38 38	R3/8"	11	16	19	-
022474	A016 12 12	R1/2"	13	18,5	24	-
022475	A016 34 34	R3/4"	14	20	30	-
022476	A016 01 01	R1"	15,5	22	36	-

4 - ACCESSORIES


Standard fittings

Series A



Main features

Type	Description
A009	Male BSP plug with O-ring. In nickel-plated brass, O-ring in NBR.

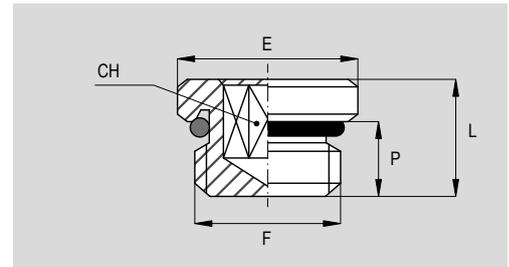


Dimensions

Code	Item	F	CH	P	L	E	Weight (g)
022521	A009 05 05	M5x0,8	2,5	4,5	7,2	8	-
022522	A009 18 18	G1/8"	5	6,5	9,5	14	-
022523	A009 14 14	G1/4"	6	8	11,5	17	-
022524	A009 38 38	G3/8"	8	9	12,5	20	-
022525	A009 12 12	G1/2"	10	10	14	26	-

Main features

Type	Description
A010	Female plug. In nickel-plated brass.

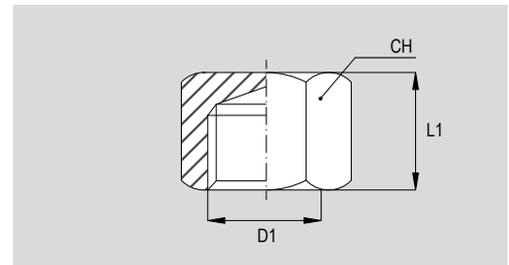

Dimensions

Code	Item	D1	L1	CH	Weight (g)
022537	A010 05 05	M5x0,8	7	8	-
022531	A010 18 18	G1/8"	11	14	-
022532	A010 14 14	G1/4"	13	17	-
022533	A010 38 38	G3/8"	14	20	-
022534	A010 12 12	G1/2"	15	24	-
022535	A010 34 34	G3/4"	16	30	-
022536	A010 01 01	G1"	18	38	-


Standard fittings

Series A



Main features

Type	Description
A011	BSP olive. In nickel-plated brass.

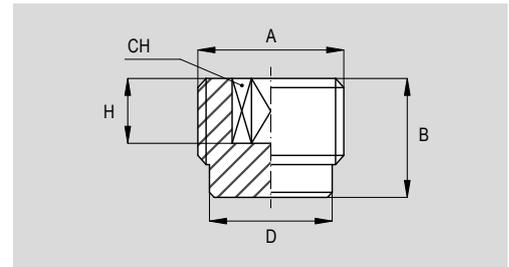


Dimensions

Code	Item	A	B	CH	D	H	Weight (g)
022541	A011 18 18	G1/8"	7,5	5	8	4	-
022542	A011 14 14	G1/4"	10	6	11	6	-
022543	A011 38 38	G3/8"	10	8	14	6	-
022544	A011 12 12	G1/2"	11	10	18	7	-

Main features

Type	Description
A012	BSPT olive. In nickel-plated brass.

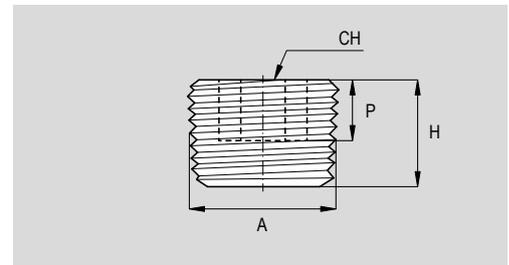

Dimensions

Code	Item	A	H	P	CH	Weight (g)
022546	A012 18 18	R1/8"	7,5	4	5	-
022547	A012 14 14	R1/4"	10	5	6	-
022548	A012 38 38	R3/8"	10	6	8	-
022549	A012 12 12	R1/2"	12	8	10	-

4 - ACCESSORIES


Standard fittings

Series A



Main features

Type	Description
A014	M/F BSP reducing insert. In nickel-plated brass.

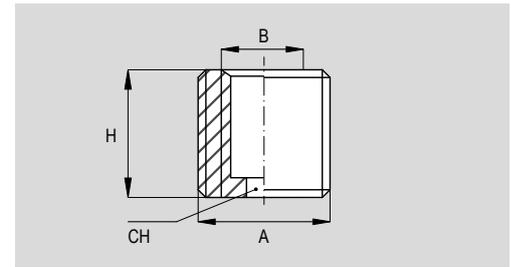


Dimensions

Code	Item	A	B	H	CH	Weight (g)
022571	A014 18 05	G1/8"	M5x0,8	6	3	-
022572	A014 14 18	G1/4"	G1/8"	7	6	-
022573	A014 38 18	G3/8"	G1/8"	9	6	-
022574	A014 38 14	G3/8"	G1/4"	9	8	-
022575	A014 12 14	G1/2"	G1/4"	10	8	-
022576	A014 12 38	G1/2"	G3/8"	10	10	-
022577	A014 34 12	G3/4"	G1/2"	12	14	-
022578	A014 01 34	G1"	G3/4"	14	16	-

Main features

Type	Description
A021 	F/F elbow. In nickel-plated brass.

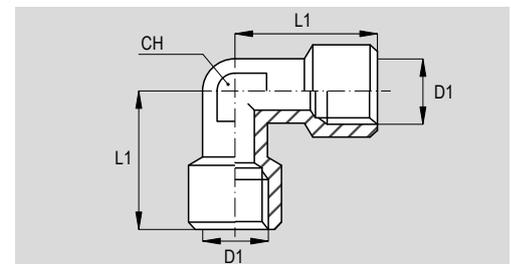

Dimensions

Code	Item	D1	L1	CH	Weight (g)
022717 	A021 05 05	M5x0,8	11	9	-
022711 	A021 18 18	G1/8"	21	10	-
022712 	A021 14 14	G1/4"	26	13	-
022713 	A021 38 38	G3/8"	30	17	-
022714 	A021 12 12	G1/2"	34	21	-
022715	A021 34 34	G3/4"	36,5	25	-
022716	A021 01 01	G1"	45	30	-


Standard fittings

Series A



Main features

Type	Description
A022	M/F elbow. In nickel-plated brass.

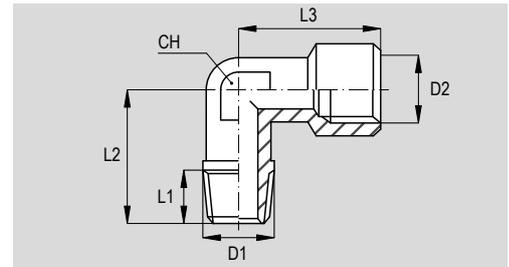


Dimensions

Code	Item	D1	D2	L1	L2	L3	CH	Weight (g)
022737	A022 05 05	M5x0,8	M5x0,8	4	11,5	11	9	-
022731	A022 18 18	R1/8"	G1/8"	7,5	18	21	10	-
022732	A022 14 14	R1/4"	G1/4"	11	25	26	13	-
022733	A022 38 38	R3/8"	G3/8"	11,5	28	30	17	-
022734	A022 12 12	R1/2"	G1/2"	14	30	34	21	-
022735	A022 34 34	R3/4"	G3/4"	14,5	32	36,5	25	-
022736	A022 01 01	R1"	G1"	16,8	39	45	30	-

Main features

Type	Description
A035	M/M elbow. In nickel-plated brass.

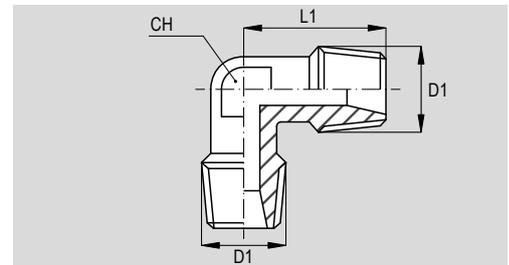

Dimensions

Code	Item	D1	L1	CH	Weight (g)
022787	A035 05 05	M5x0,8	11,5	9	-
022781	A035 18 18	R1/8"	18	10	-
022782	A035 14 14	R1/4"	22	13	-
022783	A035 38 38	R3/8"	26	17	-
022784	A035 12 12	R1/2"	30	21	-
022785	A035 34 34	R3/4"	32	25	-
022786	A035 01 01	R1"	39	30	-


Standard fittings

Series A



Main features

Type	Description
A023	F/F/F tee. In nickel-plated brass.

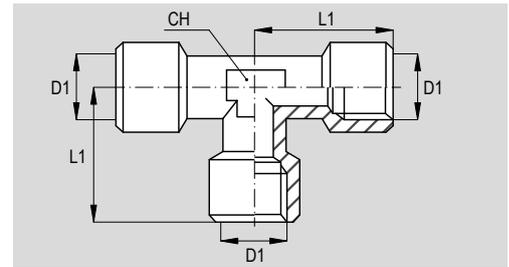


Dimensions

Code	Item	D1	L1	Ch	Weight (g)
022747	A023 05 05	M5x0,8	11	9	-
022741	A023 18 18	G1/8"	21	12	-
022742	A023 14 14	G1/4"	26	13	-
022743	A023 38 38	G3/8"	30	17	-
022744	A023 12 12	G1/2"	34	21	-
022745	A023 34 34	G3/4"	36,5	25	-
022746	A023 01 01	G1"	45	30	-

Main features

Type	Description
A024	F/M/F tee. In nickel-plated brass.

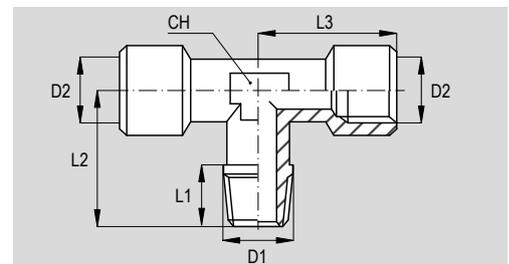

Dimensions

Code	Item	D1	D2	L1	L2	L3	CH	Weight (g)
022757	A024 05 05	M5x0,8	M5x0,8	4	11,5	11	9	-
022751	A024 18 18	R1/8"	G1/8"	7,5	18	21	10	-
022752	A024 14 14	R1/4"	G1/4"	11	25	26	13	-
022753	A024 38 38	R3/8"	G3/8"	11,5	28	30	17	-
022754	A024 12 12	R1/2"	G1/2"	14	30	34	21	-
022755	A024 34 34	R3/4"	G3/4"	14,5	32	36,5	25	-
022756	A024 01 01	R1"	G1"	16,5	39	45	30	-


Standard fittings

Series A



Main features

Type	Description
A025	M/F/F tee. In nickel-plated brass.

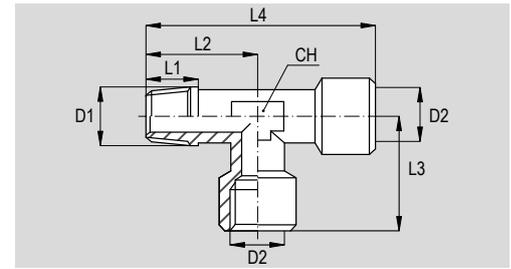


Dimensions

Code	Item	D1	D2	L1	L2	L3	L4	CH	Weight (g)
022767	A025 05 05	M5x0,8	M5x0,8	4	11,5	11	22	9	-
022761	A025 18 18	R1/8"	G1/8"	7,5	18	21	39,5	10	-
022762	A025 14 14	R1/4"	G1/4"	11	25	26	48,5	13	-
022763	A025 38 38	R3/8"	G3/8"	11,5	28	30	53,5	17	-
022764	A025 12 12	R1/2"	G1/2"	14	30	34	63	21	-
022765	A025 34 34	R3/4"	G3/4"	14,5	33	36,5	68,5	25	-
022766	A025 01 01	R1"	G1"	16,5	39	45	84	30	-

Main features

Type	Description
A027	M/M/F tee. In nickel-plated brass.

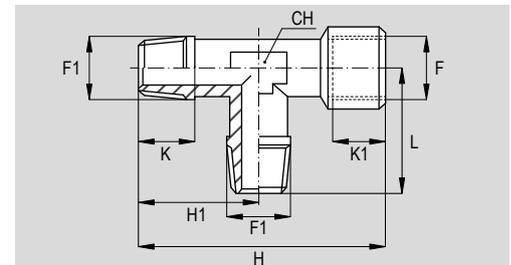

Dimensions

Code	Item	F	F1	K	K1	H	H1	L	CH	Weight (g)
022815	A027 18 18	G1/8"	R1/8"	8	8	39,5	18,5	18,5	10	-
022816	A027 14 14	G1/4"	R1/4"	11	11	49	23,5	23,5	13	-
022817	A027 38 38	G3/8"	R3/8"	11,5	11,5	54	26	26	17	-
022818	A027 12 12	G1/2"	R1/2"	14	14	64,5	31	31	21	-
022819	A027 34 34	G3/4"	R3/4"	14,5	16,5	68,5	36,5	36,5	25	-

4 - ACCESSORIES


Standard fittings

Series A



Main features

Type	Description
A036	M/M/M tee. In nickel-plated brass.

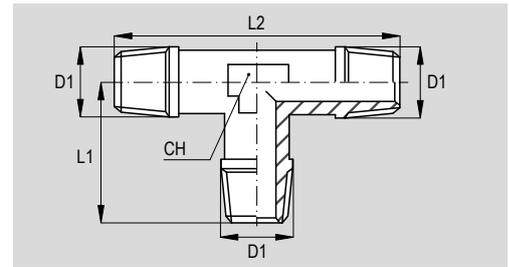


Dimensions

Code	Item	D1	L1	L2	CH	Weight (g)
022801	A036 18 18	R1/8"	18	36	10	-
022802	A036 14 14	R1/4"	22	44	13	-
022803	A036 38 38	R3/8"	26	52	17	-
022804	A036 12 12	R1/2"	30	60	21	-
022805	A036 34 34	R3/4"	32	64	25	-
022806	A036 01 01	R1"	39	78	30	-

Main features

Type	Description
A045	M/F/M tee. In nickel-plated brass.

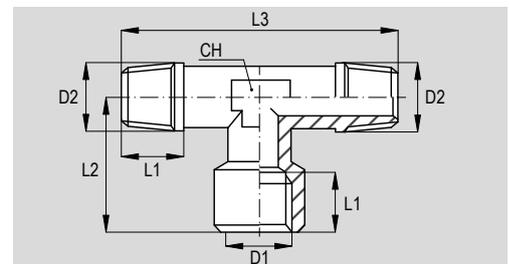

Dimensions

Code	Item	D1	D2	L1	L2	L3	CH	Weight (g)
022901	A045 18 18	G1/8"	R1/8"	7,5	21	36	10	-
022902	A045 14 14	G1/4"	R1/4"	11	26	44	13	-
022903	A045 38 38	G3/8"	R3/8"	11,5	27	51	17	-
022904	A045 12 12	G1/2"	R1/2"	14	32	59	21	-
022905	A045 34 34	G3/4"	R3/4"	14,5	36,5	64	25	-
022906	A045 01 01	G1"	R1"	16,5	45	78	30	-


Standard fittings

Series A



Main features

Type	Description
A040	F/F/F Y. In nickel-plated brass.

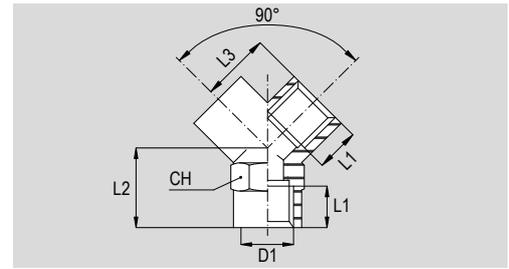


Dimensions

Code	Item	D1	L1	L2	L3	CH	Weight (g)
022841	A040 18 18	G1/8"	8	12	14	13	-
022842	A040 14 14	G1/4"	11	14	17	17	-
022843	A040 38 38	G3/8"	11,5	16	19	20	-
022844	A040 12 12	G1/2"	14	19	24,5	25	-

Main features

Type	Description
A041	F/M/F Y. In nickel-plated brass.

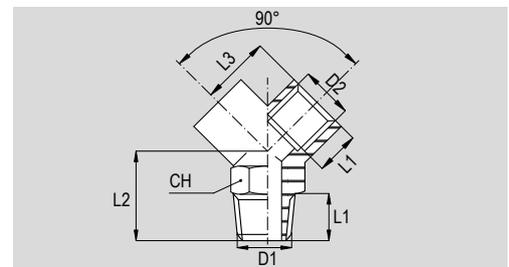

Dimensions

Code	Item	D1	D2	L1	L2	L3	CH	Weight (g)
022861	A041 18 18	R1/8"	G1/8"	8	16	14	13	-
022862	A041 14 14	R1/4"	G1/4"	11	20	17	17	-
022863	A041 38 38	R3/8"	G3/8"	11,5	22	19	20	-
022864	A041 12 12	R1/2"	G1/2"	14	27	24,5	25	-

4 - ACCESSORIES


Standard fittings

Series A



Main features

Type	Description
A026	F/F/F/F +. In nickel-plated brass.

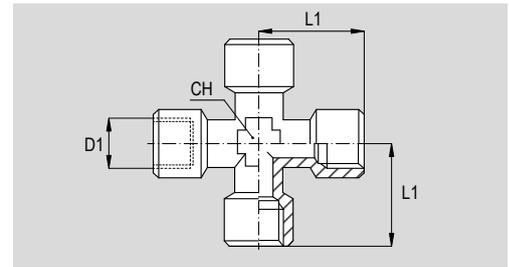


Dimensions

Code	Item	D1	L1	CH	Weight (g)
022771	A026 18 18	G1/8"	21	10	-
022772	A026 14 14	G1/4"	26	13	-
022773	A026 38 38	G3/8"	30	17	-
022774	A026 12 12	G1/2"	34	21	-

Main features

Type	Description
A046	F/M/F/F +. In nickel-plated brass.

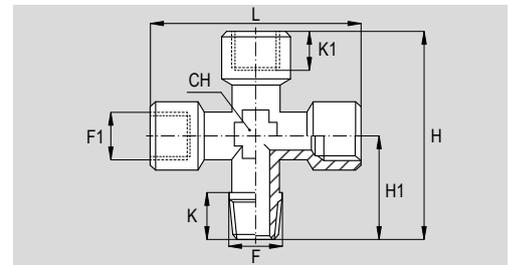

Dimensions

Code	Item	F	F1	K	K1	H	H1	L	CH	Weight (g)
022891	A046 18 18	R1/8"	G1/8"	8	8	39,5	18,5	42	10	-
022892	A046 14 14	R1/4"	G1/4"	11	11	49	23,5	51	13	-
022893	A046 38 38	R3/8"	G3/8"	11,5	11,5	54	26	56	17	-
022894	A046 12 12	R1/2"	G1/2"	14	14	64,5	31	67	21	-


Standard fittings

Series A



Main features

Type	Description
A042 	Female single banjo. In nickel-plated brass. Compatible with bolt types R31, R32, R59 and R60. Compatible with flow regulators typer V14 and V15. Compatible with accessories with integrated function types V45, V46 and V47.

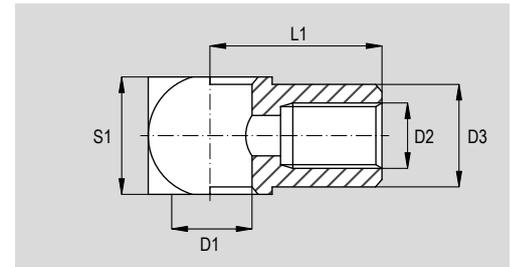

Dimensions

Code	Item	D1	D2	D3	L1	S1	Weight (g)
022875	A042 05 05	5,1	M5x0,8	9	11	10	-
022871 	A042 18 18	10	G1/8"	14	17	15	-
022872 	A042 14 14	13,2	G1/4"	17	22	18	-
022873 	A042 38 38	17	G3/8"	20	26	20	-
022874 	A042 12 12	21	G1/2"	25	32	24	-

QUICK-LOCK

fittings



Find out our
key products



Solution for most applications



Easy and intuitive choice



Excellent value for money



Wide availability



Fast delivery

